



**INSTANT SECURITY LIGHTING
SIMPLY PUT INTO EXISTING
FIXTURES**

**INTEGRATED MOTION
ACTIVATED SENSOR**

**SENSOR HAS A 90° VIEWING
ANGLE AND 26' RANGE**

**WORKS WITH STANDARD
FIXTURES**

**LIGHT ACTIVATES FOR
5 MINUTES WHEN MOTION
IS DETECTED**

DUSK-TO-DAWN OPERATION

**DUAL MODE CAPABLE
WITH MOTION SENSOR
OR ALWAYS-ON**

SUGGESTED APPLICATIONS

Indoor or Outdoor Applications,
Including Walkways,
Entryways and Garages

LED PIR SENSOR LAMPS

INTEGRATED MOTION SENSOR



**MOTION SENSOR
ACTIVATED**

MOTION ACTIVATED FOR CONVENIENCE & SAFETY

SATCO|NUVO's PIR screw-base lamps with integrated motion sensor turn any luminaire into a motion activated light source without added wiring. Conveniently install lamps to improve safety and security in any application. Available in A19 and PAR38 bulb shapes and rated for wet locations, these lamps can be used indoors or outdoors, and are ideal for walkways, entryways, and garages.



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V/60Hz
Sensor Type: Passive Infrared Sensor (PIR)
Detection Area: 90°
CRI: 90

Functional Life: 15,000 Hours
Color: White
Location Rating: Wet
Ambient Operating Temperature: -20°C to +45°C (-4°F to +113°F)





ITEM SPECIFICATIONS / ORDER INFO

Item	Shape	Base	Watts	Replacement Wattage	Lumens	CCT	Beam Angle	Efficacy	UPC	Pack Qty
S11443	PAR 38	E26	14W	100W	1,150	3000K	40°	Up to 82 LPW	045923114434	12/6
S11444	PAR 38	E26	14W	100W	1,150	5000K	40°	Up to 82 LPW	045923114441	12/6
S11445	A19	E26	12W	75W	1,050	3000K	230°	Up to 88 LPW	045923114458	24/12
S11446	A19	E26	12W	75W	1,050	5000K	230°	Up to 88 LPW	045923114465	24/12

DIMENSIONS

Item	(A) MOL	(B) MOD	Weight (Lbs)
S11443	5.35"	4.85"	.76
S11444	5.35"	4.85"	.76
S11445	5.11"	2.36"	.27
S11446	5.11"	2.36"	.27

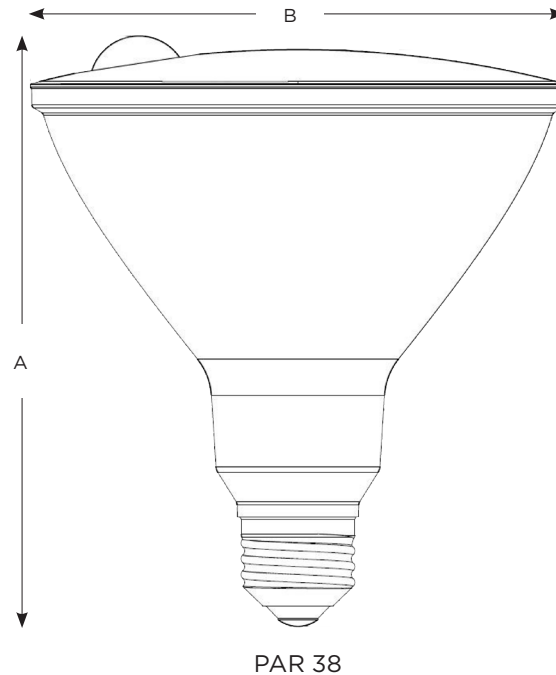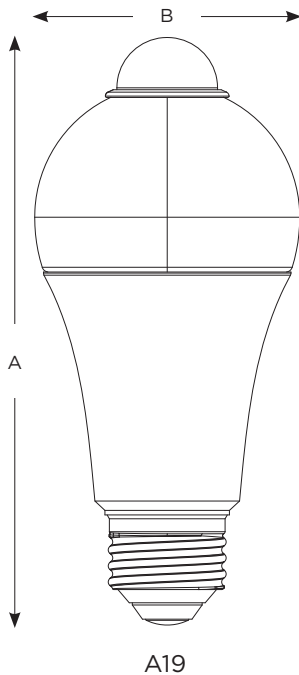

Specifications are subject to change without prior notice. Replacement wattage shown depends on application and fixture. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.