

# TEMPORARY WORK LIGHT

## PERFORMER SERIES | 120V



**LINKABLE UNITS**

**EASY INSTALLATION**

**LIGHTWEIGHT AND PORTABLE**

**360° BEAM SPREAD**

**HIGH LUMEN OUTPUT**

**SUGGESTED APPLICATIONS**

- Temporary Lighting
- Warehouses
- Construction Job Sites
- Workshops



Transform your job-site lighting with SATCO|NUVO's PERFORMER Series temporary work lights. Engineered to withstand tough conditions, these durable yet lightweight lamps are ideal for both indoor and outdoor use. Choose between two models: a 100W option with 12,000 lumens or a 150W option with 18,000 lumens, to suit your specific lighting needs. Constructed from high-quality plastic housing and aluminum heat sinks, these lamps ensure rapid heat dissipation. Featuring a 6-foot quick-connect power cord and a removable carabiner clip, installation and maneuverability are effortless. With 360-degree illumination, 2kV surge protection, and the capability to link multiple units seamlessly, these lamps are the perfect choice to provide comprehensive lighting coverage across your work areas.



**GENERAL SPECIFICATIONS**

**Range Voltage:** 120V

**Frequency:** 50/60Hz

**Power Factor:** >0.9

**THD:** <20%

**Dimming:** Non-Dimmable

**Surge Protection Rating:** 2kV

**Efficacy:** 110 LPW

**CCT:** 5000K

**CRI:** 80+

**Beam Angle:** 360°

**Location Rating:** Damp

**Ambient Operating Temperature:** -30°C (-22°F) to +60°C (+140°F)

**Material:** Polycarbonate

**Lens Material:** Polycarbonate/Frost

**Mounting Options:** Carabiner Clip Included

**Functional Life:** 30,000 Hours

**Warranty:** 3 Years




**ITEM SPECIFICATIONS / ORDER INFO**

Item	Lumens	Watts	Replacement Wattage	Input Current @120V	Connectable Units @120V
<b>S13173</b>	12000	100W	400W	0.90A	6 Units
<b>S13174</b>	18000	150W	600W	1.40A	4 Units

**DIMENSIONS/WEIGHTS**

Item	Diameter (A)	Height (B)	Weight
<b>S13173</b>	5.43"	9.74"	3.66 Lbs.
<b>S13174</b>	5.43"	11.51"	4.28 Lbs.

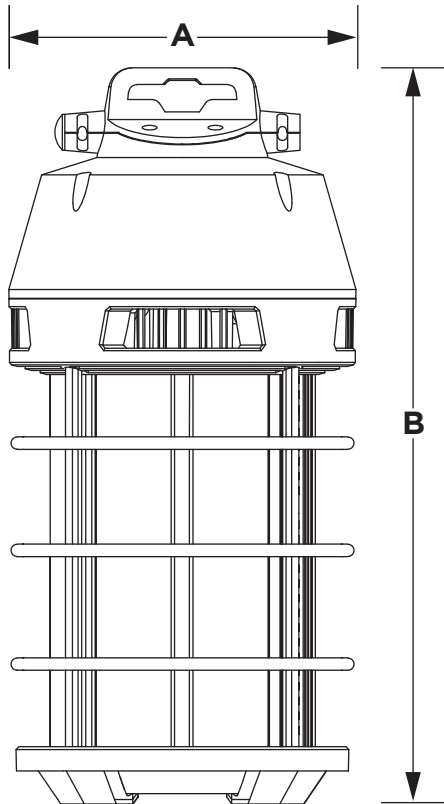

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**CAUTION - RISK OF ELECTRIC SHOCK.**  
Do not use if outer lamp envelope is damaged or broken.

**WARNING:** Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Specifications are subject to change without prior notice.

Visit [Satco.com/service/warranty](http://Satco.com/service/warranty) for complete warranty details