

LED EMERGENCY LIGHT

NYC APPROVED



**TWO OR THREE ADJUSTABLE
LIGHT HEADS**

**WALL MOUNTING,
ACCESSORIES INCLUDED**

**5VA FLAME RETARDANT
ABS LAMP HEADS**

**90 MINUTE BATTERY BACKUP
RUN TIME**

**TEST SWITCH AND
AC SUPPLY INDICATOR**

SUGGESTED APPLICATIONS

Commercial & Industrial,
Garages, Retail,
Schools, Hospitals

SATCO|NUVO's NYC Approved LED Emergency Lights are the perfect solution for businesses and organizations in New York City. These lights are made with 20-gauge steel and meet all NYC, OSHA, and NFPA requirements. They have a battery backup with a 90-minute run time, as well as a battery push to test button and AC supply indicator for easy maintenance and monitoring. SATCO|NUVO's LED emergency lights are also rated for damp locations, making them ideal for use in a variety of settings. Keep occupants safe and prepared for any emergency with the highest level of safety and quality for your space.



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120/277V, 60Hz
Emergency Backup: Yes
Emergency Duration/Run Time: 90 Minutes
Recharge Time: 24 Hours
Battery Push to Test Button: Yes
Battery Type: Ni-Cad 3.6V
Recycle Time: >500
CCT: 5700
Construction: Steel Housing, 5VA Flame Retardant Thermoplastic ABS Lamp Heads

Finish/Color: White
Mounting Options: Wall
Mounting Height: 7.5 Ft/10 Ft
Center to Center Spacing: 25 Ft/24 Ft
Path of Egress: 6 Ft
Location Rating: Damp
Ambient Operating Temperature: 10°C (50°F) to 40°C (104°F)
Warranty: 2 Years




ITEM SPECIFICATIONS/ORDER INFO

Item	UPC	Watts	Input Current @120V/277V	Lumens	Number of Lamp Heads
67-132	045923675812	1.5W	.013/.005A	220lm	2 Adjustable
67-133	045923675829	1.5W	.013/.005A	330lm	3 Adjustable

DIMENSIONS/WEIGHTS

Item	Width (A)	Height (B)	Depth (C)	Weight (Lbs)
67-132	12.00"	9.88"	2.00"	2.54
67-133	12.00"	9.88"	2.00"	2.98

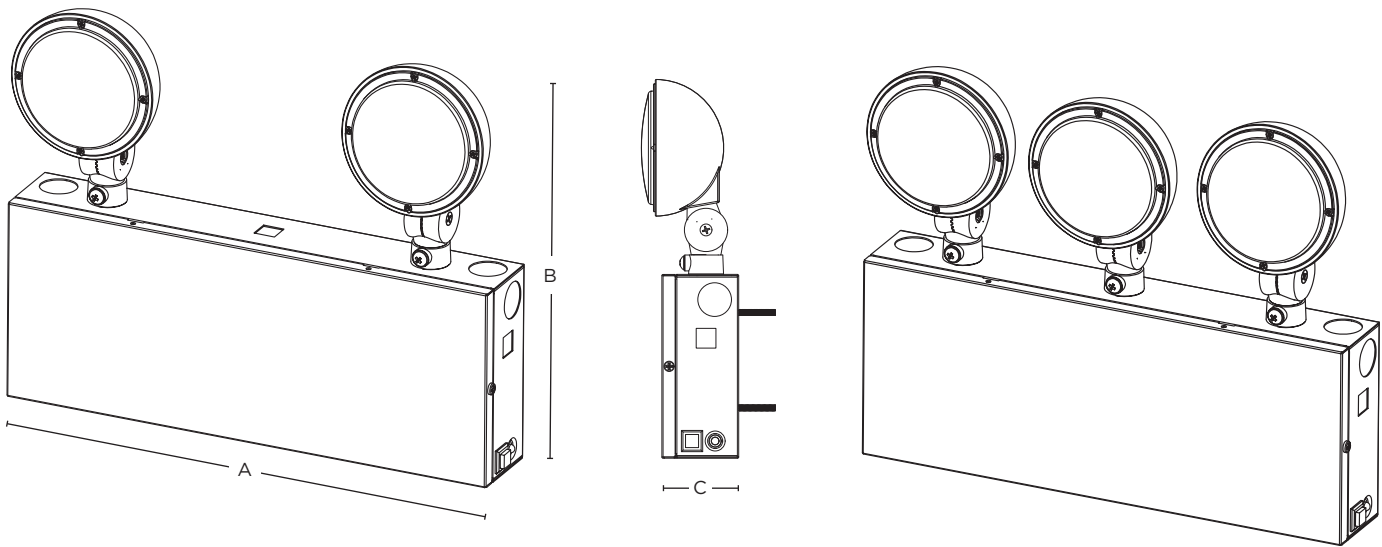

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Specifications are subject to change without prior notice. Visit satco.com/service/warranty for complete 2 year warranty details.