

LED EXIT SIGN

NYC APPROVED



RED LETTERING

SINGLE OR DUAL FACE

**KNOCKOUT CHEVRON
DIRECTIONAL ARROWS**

**CEILING, WALL OR
SIDE MOUNTING,
ACCESSORIES INCLUDED**

20-GAUGE STEEL HOUSING

**90 MINUTE BATTERY BACKUP
RUN TIME**

**TEST SWITCH AND
AC SUPPLY INDICATOR**

SUGGESTED APPLICATIONS

Commercial & Industrial,
Garages, Retail,
Schools, Hospitals

Introducing SATCO|NUVO's NYC Approved LED Exit Sign - the perfect solution for your emergency lighting needs. With its configurable knock out chevron directional arrows and NYC approved red lettering, this exit sign clearly and effectively guides occupants to safety during power outages or emergencies. Its versatile mounting options (wall, ceiling, and side) and 20-gauge steel construction make it durable and suitable for a variety of locations. Additionally, the LED exit sign features a battery backup with a 90-minute run time, as well as a battery push-to-test button and AC supply indicator for added peace of mind. This LED exit sign is rated for damp locations and meets NYC, OSHA, and NFPA requirements, ensuring the highest level of safety and quality for your space. Trust SATCO|NUVO's NYC Approved LED Exit Sign to keep your occupants safe and prepared for any emergency.



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120/277V, 60Hz
Emergency Backup: Yes
Emergency Duration/Run Time: 90 Minutes
Recharge Time: 24 Hours
Battery Push to Test Button: Yes
Battery Type: Ni-Cad 3.6V
Recycle Time: >500
Letter Height: 8"
Letter Stroke: 1"

Construction: 20-Gauge Steel
Finish/Color: White
Mounting Options: Universal: Wall, Ceiling and Side
Location Rating: Damp
Ambient Operating Temperature: 10°C (50°F) to 40°C (104°F)
Warranty: 2 Years




ITEM SPECIFICATIONS/ORDER INFO


Item	UPC	Watts	Input Current @120V/277V	Letter Color	Face Type
67-102	045923675690	2W	.017/.007A	Red	Single/Dual

DIMENSIONS/WEIGHTS


Item	Width (A)	Height (B)	Depth (C)	Weight (Lbs)
67-102	14.56"	9.63"	2.31"	6.61

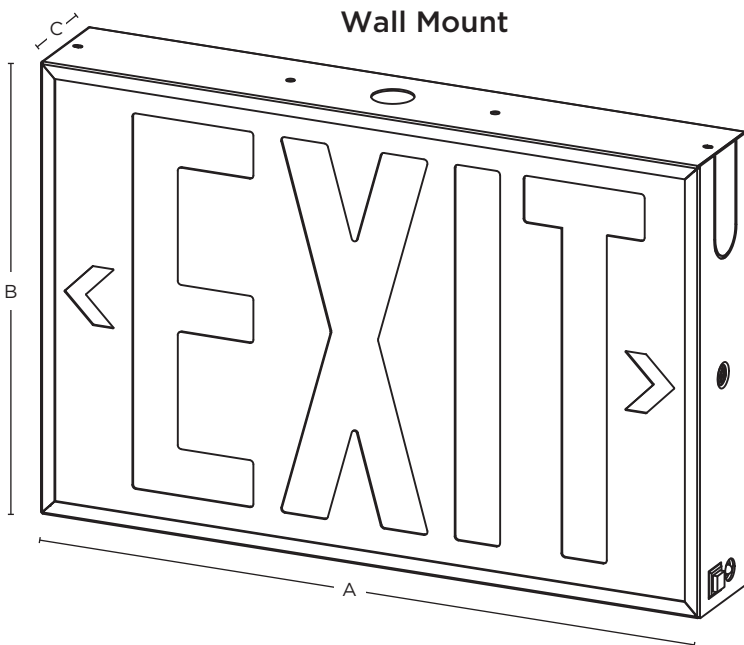

Wall Mount

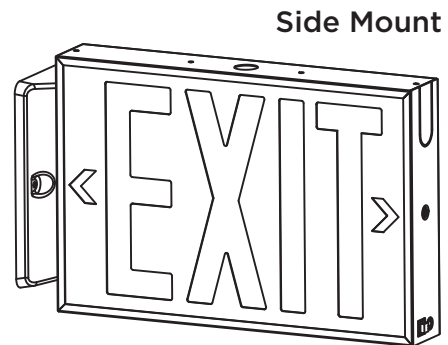

Side Mount

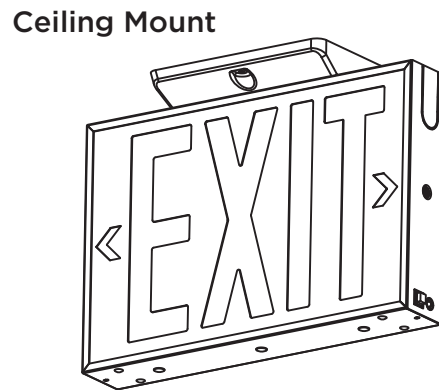

Ceiling Mount

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Specifications are subject to change without prior notice. Visit satco.com/service/warranty for complete 2 year warranty details.