

LED HI-PRO SHOP LIGHT

8" ROUND



RUGGED DESIGN

WIDE LIGHT DISTRIBUTION

6' CORD WITH MOLDED PLUG

**PLUG-IN OR HARD WIRE
INSTALLATION**

AVAILABLE IN 3K, 4K, 5K CCT

THREADED LOCK CLASP

SUGGESTED APPLICATIONS

Workspaces, Garages,
Barndominiums, Party Tents,
Sheds, Temporary Lighting

Introducing SATCO|NUVO's LED Hi- Pro Shop Light. This versatile and simple shop light is ready to perform in the harshest environments or in more common areas such as Garages or Workshops. Available in three color temperatures and two wattage options. The IK08 Lens and Wet location rating makes this a one-of-a-kind Shop Light.



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V, 50/60Hz
Surge Protection Rating: 2kV
CRI: 80
Beam Angle: 110°
Functional Life (L70): 30,000 Hours
Warranty: 3 Years

IK Rating: IK08
IP Rating: IP65
Ambient Operating Temperature:
 -40°C (-40°F) to +45°C (+113°F)
Construction: Die Cast Aluminum
Lens Material: Polycarbonate



ITEM SPECIFICATIONS / ORDER INFO

Item	Finish	CCT	Watts	Lumens	Efficacy	Input Current	UPC
65-960	Black	3000K	60W	6274lm	105 LPW	0.500A	045923661150
65-961	Black	4000K	60W	6777lm	113 LPW	0.500A	045923661167
65-962	Black	5000K	60W	6900lm	115 LPW	0.500A	045923661174
65-963	Black	3000K	80W	8523lm	107 LPW	0.667A	045923661181
65-964	Black	4000K	80W	9071lm	114 LPW	0.667A	045923661198
65-965	Black	5000K	80W	9210lm	115 LPW	0.667A	045923661204
65-970	White	3000K	60W	6274lm	105 LPW	0.500A	045923661303
65-971	White	4000K	60W	6777lm	113 LPW	0.500A	045923661365
65-972	White	5000K	60W	6900lm	115 LPW	0.500A	045923661372
65-973	White	3000K	80W	8523lm	107 LPW	0.667A	045923661389
65-974	White	4000K	80W	9071lm	114 LPW	0.667A	045923661396
65-975	White	5000K	80W	9210lm	115 LPW	0.667A	045923661402

OPTIONAL ACCESSORIES

Item	Description	UPC
65-956	CAGE	045923651793
65-957	YOKE MOUNT BLACK	045923651809
65-958	YOKE MOUNT WHITE	045923651854
65-959	SUSPENSION KIT	045923651861



CAGE
(65-956)





YOKE MOUNT
(65-957, 65-598)



SUSPENSION KIT
(65-959)

DIMENSION

Item	Height (A)	Diameter (B)
65-960 to 975	5.63"	8.27"

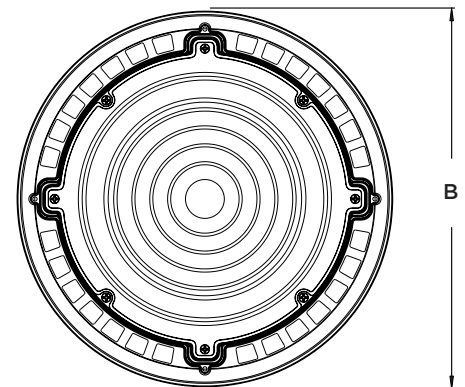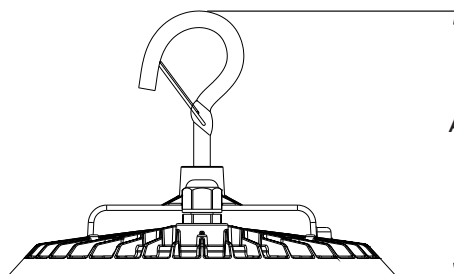

Specifications are subject to change without prior notice.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.