


# LED T8 LAMPS WITH BATTERY BACKUP

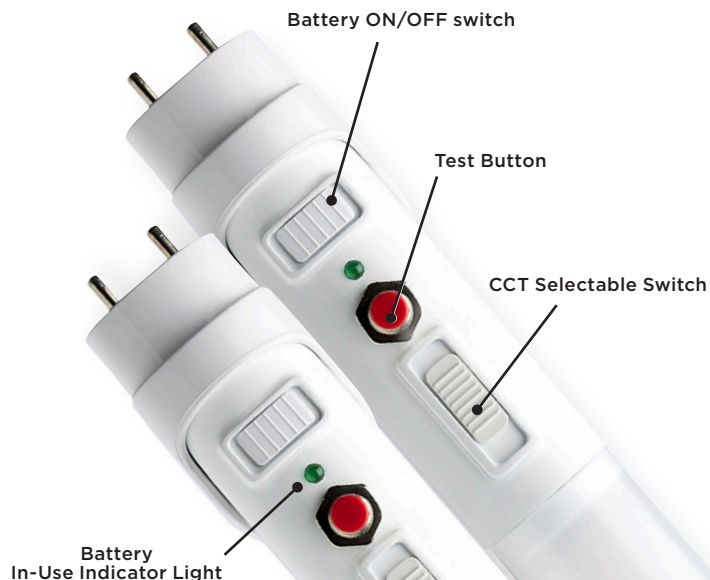

**PROVIDES UP TO 90 MINUTES  
OF ILLUMINATION DURING  
POWER OUTAGES**

**BATTERY ON/OFF SWITCH  
CONSERVES BATTERY  
AFTER INSTALLATION\***

**INTEGRATED ALUMINUM  
HEATSINK TO PROMOTE  
HEAT DISSIPATION**

**FEATURES COLORQUICK  
TECHNOLOGY, ALLOWING  
FOR EASY SELECTION OF  
CCT AT INSTALLATION**

**5 YEAR WARRANTY**

**SUGGESTED APPLICATIONS**

Commercial and Industrial,  
Hospitals, Offices, Workshops



**ColorQuick**

Selectable Color Technology



SATCO|NUVO's T8 Lamps with Battery Backup are the logical choice for commercial installations. Providing up to 90-minutes of illumination in the event of a power failure, these lamps are ideal for use where backup lighting is essential. Available in 15W and 17W options, both are designed to replace our most popular T8 and T12 fluorescent lamps, with the 17W model offering the option of higher lumen output. Increase safety and energy efficiency while reducing maintenance costs with this easy-to-install fluorescent alternative.



**GENERAL SPECIFICATIONS**

**Input Voltage, Frequency:** 120-277V, 60Hz

**Power Factor, THD%:** 0.9, <25%

**Dimmable:** Phase Cut Dimmable

**Type B Ballast Bypass**

**Efficacy:** up to 135 LPW

**CRI:** 83

**Beam Spread:** 140°

**Functional Life (L70):** >60,000 Hours

**Location Rating:** Damp

**Rated for use in enclosed fixtures**

**Ambient Operating Temperature:** -20°C (-4°F) to +45° (+113°F)

**Base:** G13 Medium Bi Pin

**Battery Life:** 90 minutes

**Battery Type:** Lithium

**Battery Recharge Time:** 24 hrs

**Lamp Weight:** 0.99 Lbs.




**ITEM SPECIFICATIONS / ORDER INFO**

Item	Description	UPC	Lumens	Wattage	Battery Wattage	Battery Lumens	Input Current @ 120V/277V	CCT	DLC ID
S11730	15T8/LED/48-CCT/EM/BP	045923117305	1,850/2,000/1,900	15W	3.5W	500	0.125/0.054A	3500K/4000K/5000K	S-U53N8J
S11731	17T8/LED/48-CCT/EM/BP	045923117312	2,100/2,300/2,200	17W	5W	700	0.142/0.061A	3500K/4000K/5000K	S-MASCZT

**ENERGY SAVINGS**

Item	LED Wattage	Fluorescent Wattage
S11730	15W	32W
S11731	17W	32W

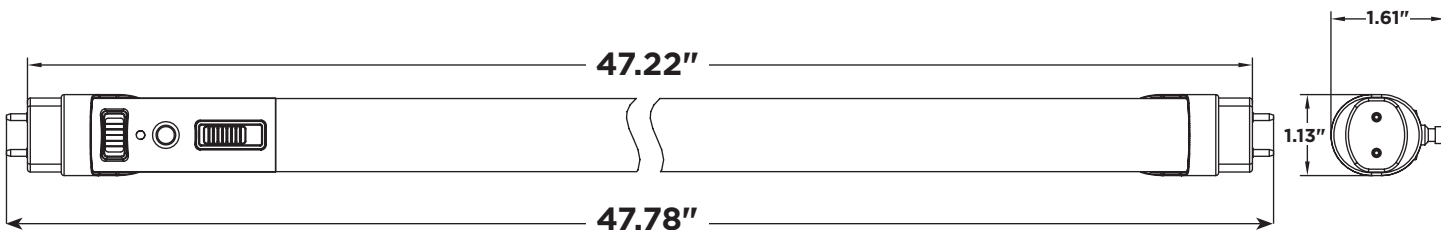

DLC Primary Use: Internal Driver/Line Voltage (UL Type B) Lamps  
 Specifications are subject to change without prior notice.  
 Replacement wattage shown depends on application and fixture.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.  
 Please refer to your product packaging for more information.

\*Turn on during installation