

# RECESSED DOWNLIGHT WITH NIGHT LIGHT

5 CCT SELECTABLE, 6" BAFFLE TRIM



**INTEGRATED NIGHT LIGHT**

**65W INCANDESCENT REPLACEMENT**

**5 CCT SELECTABLE**

**INSTALLS IN 5/6" RECESSED HOUSING**

**DUAL MODE (STANDARD AND NIGHT)**

**DIMMABLE (STANDARD LIGHT MODE)**

**SUGGESTED APPLICATIONS**

- Residential Bathrooms
- Closets
- Bedrooms
- Hallways




**Night Light Ring**

Toggle light switch to activate night light mode.



**ColorQuick™**

Selectable Color Technology  
Switch to/from the following CCT



## EFFICIENT, VERSATILE AND FUNCTIONAL

Easily convert living spaces to energy efficient LED technology with SATCO|NUVO's 6" Recessed Downlight with Night Light. Its innovative design incorporates a night light that activates with the toggle of a light switch, while aesthetically, integrates seamlessly in any room with baffle trim recessed lighting. The downlight is 5 CCT color selectable and has an excellent color rendering of 90 CRI, providing a natural light quality. It's also dimmable, IC rated, and wet location rated- suitable for bathroom installations.

This downlight is ideal for Multi-family and Residential locations including bathrooms, hallways, kitchens, stairwells and bedrooms, for new and retrofit construction.



**GENERAL SPECIFICATIONS**


**Input Voltage, Frequency:** 120V,60Hz  
**Dimmable:** Yes  
**Incandescent Replacement Wattage:** 65W  
**Efficacy:** Up to 89 LPW  
**CRI:** 90  
**Functional Life:** 50,000 Hours  
**Beam Angle:** 95  
**Location Rating:** Wet

**IC Rated:** Yes  
**Suitable for Bathroom Applications:** Yes  
**Ambient Operating Temperature:** -20C (-4F) to +40C (+104F)  
**Finish:** White  
**Trim:** Aluminum  
**Lens:** Polycarbonate  
**California Compliant:** T20 and T24



**ITEM SPECIFICATIONS / ORDER INFO**


Item	Size	Watts	Lumens	CCT Selectable	UPC	Pack QTY
S11846	5/6"	9W	800L	2700K/3000K/3500K/4000K/5000K	045923118463	8

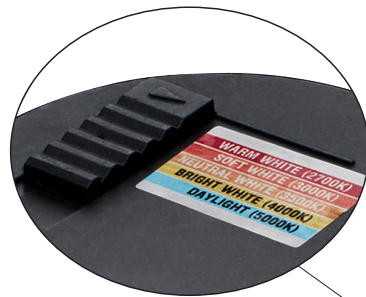


**Color Selection Switch**  
 Warm White 2700K  
 Soft White 3000K  
 Neutral White 3500K  
 Bright White 4000K  
 Daylight 5000K



**E26 Connector included**

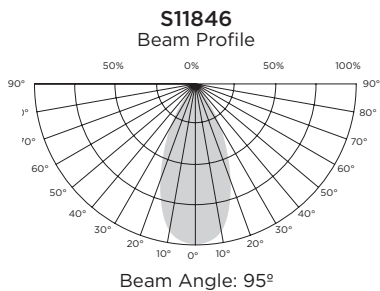

**Beam Angle: 95°**

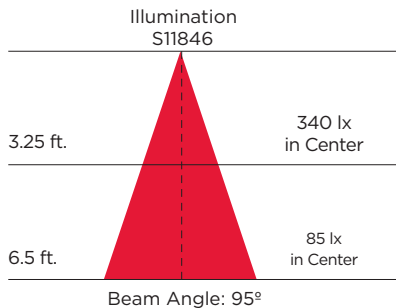

**Beam Angle: 95°**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.