


# DIMENSION PRO

## INDOOR LED SMART TAPE LIGHT KIT



**STARFISH™**  
Controlled with App



**STARFISH™ SMART  
ENABLED PRODUCT**

**DYNAMIC RGB,  
COLOR-CHANGING  
& TUNABLE WHITE**

**PRE-SET & CUSTOM  
COLOR-CHANGING EFFECTS**

**IR REMOTE CONTROL  
OR APP CONTROLLED**

**16FT, 32FT & 64FT  
KITS AVAILABLE**

**PLUG-IN OR  
DIRECT-WIRE KITS**

**CUTTABLE**

**SUGGESTED APPLICATIONS:**  
Commercial or Decorative  
Residential Applications

### HIGH BRIGHTNESS



Millions of Colors



Warm to Cool Tunable White

Immerse yourself in a world of limitless possibilities with DIMENSION Pro, the smart app-controlled tape light that will redefine your lighting experience. With the ability to choose from millions of colors or adjust the light from warm to cool tunable white, this STARFISH™ smart product puts the power of customization in your hands. Sync your light to the rhythm of your favorite music and watch as your space comes alive with vibrant hues and captivating effects. From soothing transitions to dynamic color-changing displays, DIMENSION Pro offers a wide range of mesmerizing options that will transform your space into a visual spectacle.



\*Via App or Remote



**GENERAL SPECIFICATIONS**

**Color:** RGBTW

**CRI:** 80

**Functional Life:** 50,000 Hours

**Location Rating:** Dry (Indoor Only)

**Wired Controller:** Yes

**Ambient Operating Temperature:** -20°C (-4°F) to +40°C (+104°F)

**Cuttable:** Yes\*, Distance between cuts: 4.92" (125mm)

**Dimmable:** Yes, Dimmable with App or Remote

**Warranty:** 1 Year

**Remote:** IR

\* Tape may be cut where indicated for customized installations. Cut tape can be reconnected using optional connector accessories. Total tape length should not exceed the tape supplied in the kit.



**ITEM SPECIFICATIONS / ORDER INFO**

Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64/130	16'	Plug In	120V	24V	18W	1920L	1	045923640292
64/131	32'	Plug In	120V	24V	30W	3080L	1	045923640308
64/132	64'	Plug In	120V	24V	68W	6300L	2	045923640520
64/133	16'	Direct Wired	120V-277V	24V	20W	1920L	1	045923640537
64/134	32'	Direct Wired	120V-277V	24V	30W	3080L	1	045923640544
64/135	64'	Direct Wired	120V-277V	24V	68W	6300L	2	045923640551

**ACCESSORIES INCLUDED IN KITS**



Plug-In Driver



Direct Wire Junction Box  
64/133 Includes 5, 3/8 Knockouts  
64/134 Includes 5, 3/8 Knockouts  
64/135 Includes 7, 3/8 Knockouts



Controller/Receiver



Dual Controller/Receiver  
For Models 64/132 and 64/135



IR Remote



Single Reel for  
64/130, 64/131, 64/133, and 64/134



Dual Reel for  
64/132 and 64/135 Kits

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

**OPTIONAL ACCESSORIES**

Item	Description	Qty/Bag or Box	Bag or Box/Case	UPC
<b>Tape Extension and Connectors</b>				
<b>Tape to Tape</b>				
64/160	Tape-to-Tape Connector	5	100	045923644788
64/161	6" Jumper Wire	5	100	045923644795
64/162	90° Connector	5	100	045923644801
<b>Wire to Tape</b>				
64/164	Wire to Tape Connector	6	100	045923644177
64/165	50' Tape Wire	1	50	045923644184

Item	Description	Length/Channel	Channel/Box	Channel Sets/Case	UPC
<b>Channels and Diffusers</b>					
<b>Recessed</b>					
64/150	Recessed Deep Channel and Diffuser	3.28'	5	12	045923644733
<b>Surface</b>					
64/151	Deep Channel and Diffuser	3.28'	5	12	045923644740
64/154	Shallow Channel and Diffuser	3.28'	5	12	045923644771
<b>Corner</b>					
64/152	45° Corner Channel and Diffuser	3.28'	5	12	045923644757



64-164



64-160



64-165



64-162



64-161



64-154



64-152



64-151




64-150

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

**TAPE LIGHT DIMENSIONAL DIAGRAMS**



**64/130 | 64/133**

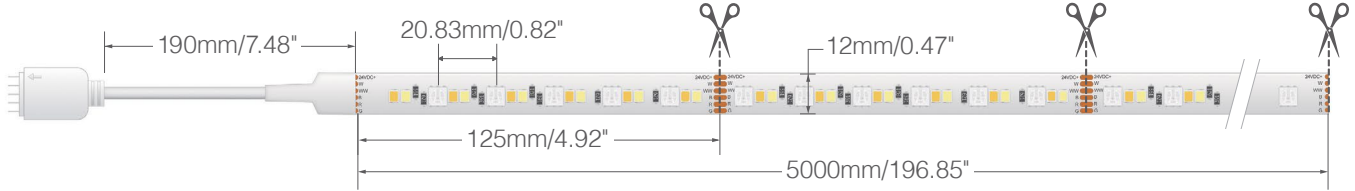

**64/131 | 64/132 | 64/134 | 64/135**

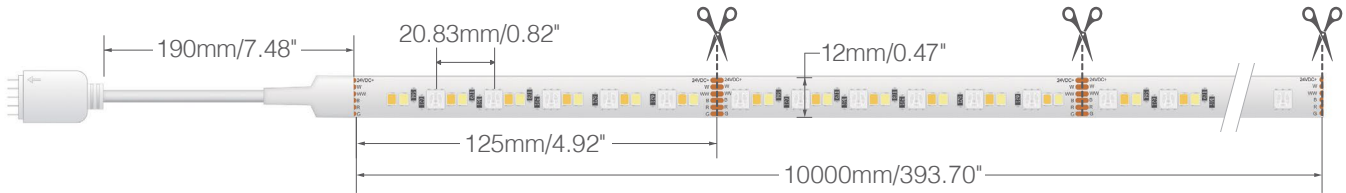

**DRIVER CONNECTION DIAGRAMS**

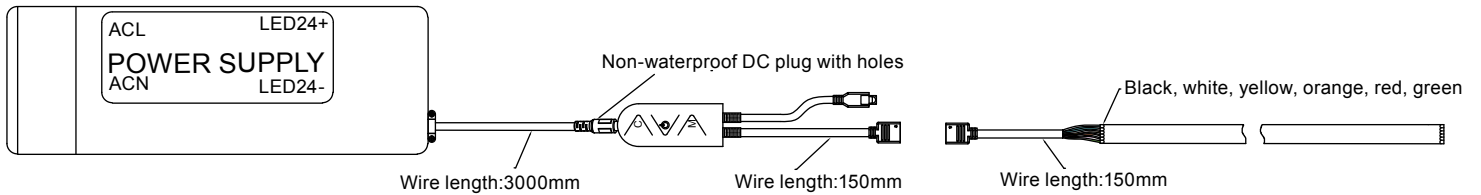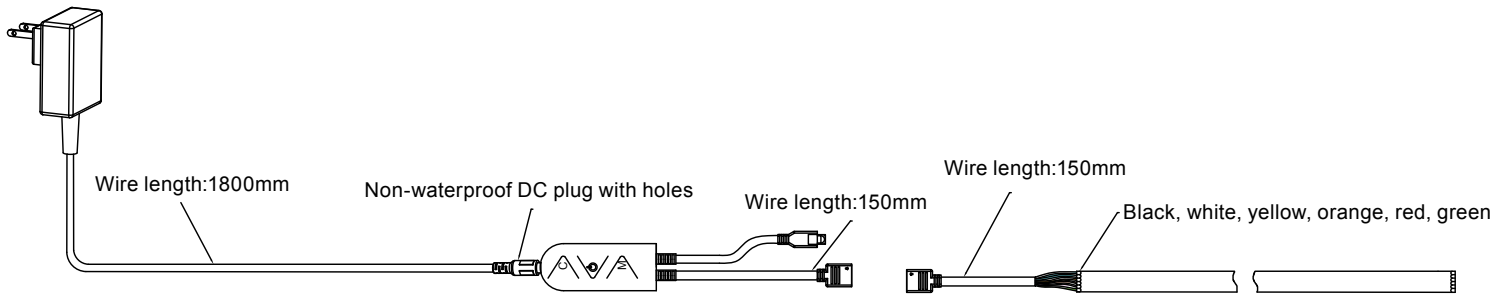


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

**CHANNEL DIMENSIONAL DIAGRAMS**


**64/150**

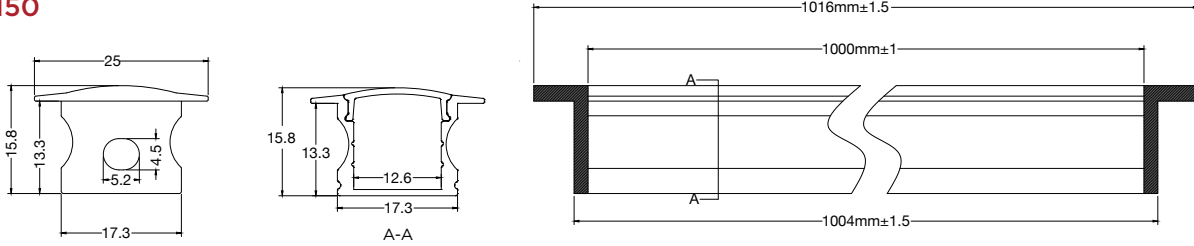


**64/151**

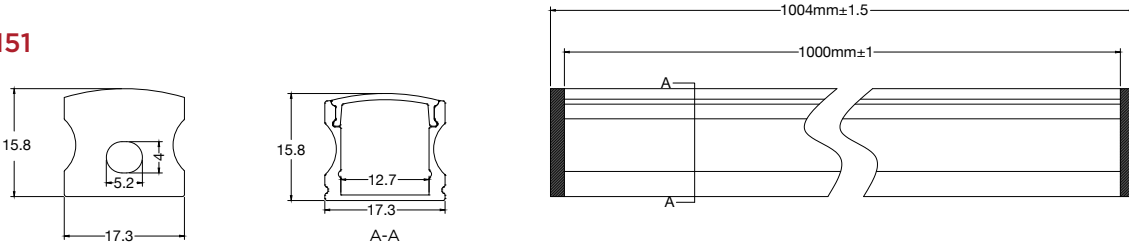

**64/152**

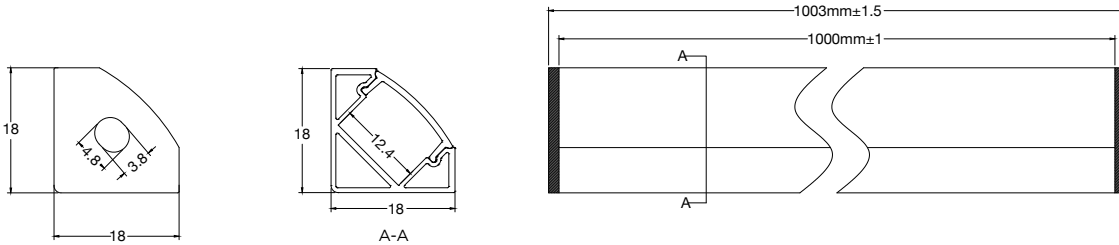

**64/154**

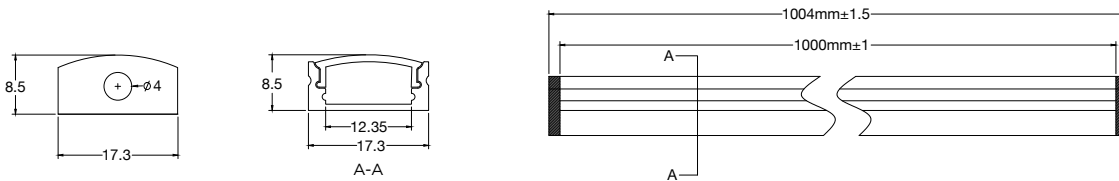

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.