## **SATCO**<sup>®</sup> NUVO<sup>®</sup>

# **DIMENSION PRO** OUTDOOR LED SMART TAPE LIGHT KIT







Dynamic RSR. Color-Changing & Tunable Web

D mes



STARFISH<sup>™</sup> SMART ENABLED PRODUCT

DYNAMIC RGB, COLOR-CHANGING & TUNABLE WHITE

PRE-SET & CUSTOM COLOR-CHANGING EFFECTS

RF REMOTE CONTROL OR APP CONTROLLED

> 16FT, 32FT & 64FT KITS AVAILABLE

PLUG-IN OR DIRECT-WIRE KITS

SUGGESTED APPLICATIONS: Outdoor Commercial or Decorative Outdoor Residential Applications

### **HIGH BRIGHTNESS**

Millions of Colors

Warm to Cool Tunable White

Elevate your outdoor space with DIMENSION Pro Outdoor tape light kits. This smart, app-controlled lighting solution offers limitless customization. Choose from millions of colors and adjust the light from warm to cool tunable white. Sync it with your music for vibrant and captivating effects. With mesmerizing options, DIMENSION Pro transforms your outdoor area into a visual spectacle.





#### **GENERAL SPECIFICATIONS**

Color: RGBTW CRI: 80 Functional Life: 50,000 Hours Location Rating: Wet Wired Controller: No Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F) Cuttable: Not Cuttable\* Dimmable: Yes, Dimmable with App or Remote Warranty: 1 Year Remote: RF

\* Outdoor tape light is not recommended to be cut. Cutting tape invalidates the IP65 rating and warranty.

#### **ITEM SPECIFICATIONS / ORDER INFO**

Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64/140	16′	Plug In	120V	24V	18W	1920L	1	045923640568
64/141	32'	Plug In	120V	24V	30W	3080L	1	045923640575
64/142	64′	Plug In	120V	24V	68W	6300L	2	045923640582
64/143	16′	Direct Wired	120V-277V	24V	20W	1920L	1	045923640599
64/144	32'	Direct Wired	120V-277V	24V	33W	3080L	1	045923640605
64/145	64′	Direct Wired	120V-277V	24V	68W	6300L	2	045923640506

Mounting

Clips

#### INCLUDED ACCESSORIES



Plug-In Driver



Direct Wire Junction Box 64/143 Includes 5, ¾ Knockouts 64/144 Includes 5, ¾ Knockouts 64/145 Includes 7, ¾ Knockouts



Dual Reel for 64/142 and 64/145 Kits



Receiver



Dual Receiver For Models 64/142 and 64/145

RF Remote



Single Reel for 64/140, 64/141, 64/143, and 64/144 Kits

#### **OPTIONAL ACCESSORIES**




Mounting Clip Pack

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.




#### TAPE LIGHT DIMENSIONAL DIAGRAMS

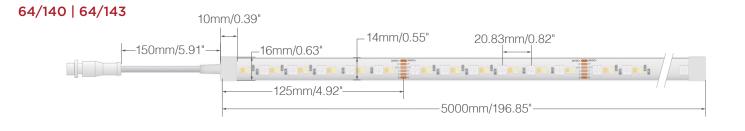

#### 64/141 | 64/142 | 64/144 | 64/145



#### **DRIVER CONNECTION DIAGRAMS**

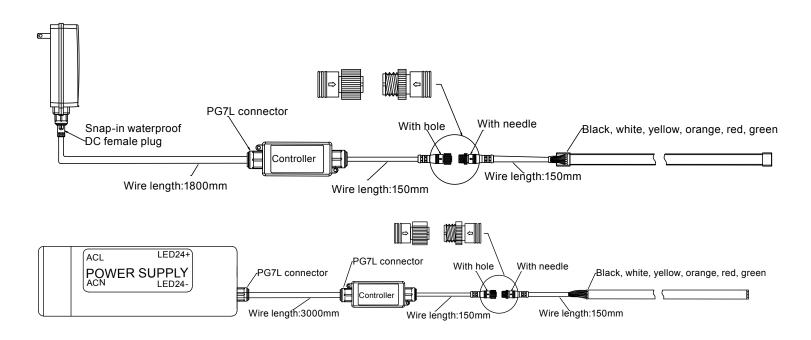

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.