SATCO NUVO

DIMENSION PLUS

INDOOR LED SMART TAPE LIGHT KIT











STARFISH™ SMART ENABLED PRODUCT

DYNAMIC RGB, COLOR-CHANGING & TUNABLE WHITE

PRE-SET & CUSTOM COLOR-CHANGING EFFECTS

IR REMOTE CONTROL OR APP CONTROLLED

16FT KITS AVAILABLE

PLUG-IN OR DIRECT-WIRE KITS

CUTTABLE

SUGGESTED APPLICATIONS:

Commercial or Decorative Residential Applications

Millions of Colors

Warm to Cool Tunable White



Unlock a world of possibilities with DIMENSION Plus, the versatile tape light designed for residential lighting and more. Choose from millions of vibrant colors or create the perfect ambiance. Sync the lighting to your favorite soundtrack and elevate your gaming experience or transform your living space. With its user-friendly features and top-notch quality, DIMENSION Plus brings a touch of magic to any setting.



















GENERAL SPECIFICATIONS

Color: RGBTW

CRI: 80

Functional Life: 50,000 Hours Location Rating: Dry (Indoor Only)

Wired Controller: Yes

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Cuttable: Yes*, Distance between cuts: 6.56" (166.67mm)

Dimmable: Yes, Dimmable with App or Remote

Warranty: 1 Year Remote: IR

ITEM SPECIFICATIONS / ORDER INFO



Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64-120	16′	Plug In	120V	24V	12W	1120L	1	045923640278
64-121	16′	Direct Wired	120V-277V	24V	14W	1120L	1	045923640285

ACCESSORIES INCLUDED IN KITS



Plug-In Driver



Direct Wire Junction Box - 5, 3%" Knockouts



Controller/Receiver



IR Remote



Single Reel for 64/120 and 64/121 Kits

^{*} Tape may be cut where indicated for customized installations. Cut tape can be reconnected using optional connector accessories. Total tape length should not exceed the tape supplied in the kit.



OPTIONAL ACCESSORIES

Item	Description	Qty/Bag or Box	Bag or Box/Case	UPC			
Tape Extension and Connectors							
Tape to Ta	аре						
64/160	Tape-to-Tape Connector	5	100	045923644788			
64/161	6" Jumper Wire	5	100	045923644795			
64/162	90° Connector	5	100	045923644801			
Wire to Tape							
64/164	Wire to Tape Connector	6	100	045923644177			
64/165	50' Tape Wire	1	50	045923644184			

Item	Description	Length/ Channel	Channel/ Box	Channel Sets/Case	UPC		
Channels and Diffusers							
Recessed							
64/150	Recessed Deep Channel and Diffuser	3.28′	5	12	045923644733		
Surface							
64/151	Deep Channel and Diffuser	3.28′	5	12	045923644740		
64/154	Shallow Channel and Diffuser	3.28′	5	12	045923644771		
Corner							
64/152	45° Corner Channel and Diffuser	3.28'	5	12	045923644757		






This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.





TAPE LIGHT DIMENSIONAL DIAGRAMS

64/120 | 64/121



DRIVER CONNECTION DIAGRAMS

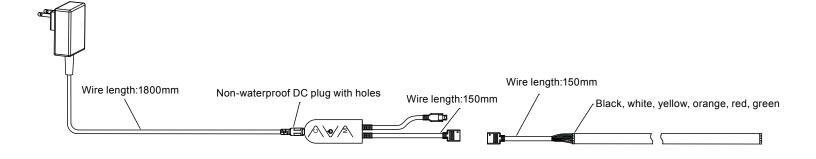





This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.




CHANNEL DIMENSIONAL DIAGRAMS


64/150







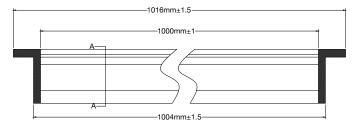

64/151









64/152









64/154







This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.