

DIMENSION PERFORMER

INDOOR LED TAPE LIGHT KIT



COLOR-CHANGING
& TUNABLE WHITE

IR REMOTE CONTROL

16FT KITS AVAILABLE

PLUG-IN OR
DIRECT-WIRE KITS

CUTTABLE

SUGGESTED APPLICATIONS:

Bedrooms, Mirror Backlighting,
Shelving, Game Rooms,
Picture Frames, Office Decor



Millions of Colors



Warm to Cool Tunable White



Transform your space effortlessly with DIMENSION Performer, the ideal tape light for easy installation and instant atmosphere. With its user-friendly design, this tape light is perfect for those seeking a hassle-free way to enhance their surroundings. Add a touch of ambiance to any space with DIMENSION Performer, and effortlessly elevate the mood and atmosphere of your environment.



*Via Remote

GENERAL SPECIFICATIONS

Color: RGBTW

CRI: 80

Functional Life: 50,000 Hours

Location Rating: Dry (Indoor Only)

Wired Controller: No

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Cuttable: Yes*, Distance between cuts: 6.56" (166.67mm)

Dimmable: Yes, Dimmable with Remote

Warranty: 1 Year

Remote: IR

* Tape may be cut where indicated for customized installations. Cut tape can be reconnected using optional connector accessories. Total tape length should not exceed the tape supplied in the kit.



ITEM SPECIFICATIONS / ORDER INFO

Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64-110	16'	Plug In	120V	24V	12W	1120L	1	045923640254
64-111	16'	Direct Wired	120V-277V	24V	14W	1120L	1	045923640261

ACCESSORIES INCLUDED IN KITS



Plug-In Driver



Direct Wire Junction Box - 5, 3/8" Knockouts



IR Remote



Receiver



Single Reel for 64/110 and 64/111 Kits

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

OPTIONAL ACCESSORIES

Item	Description	Qty/Bag or Box	Bag or Box/Case	UPC
Tape Extension and Connectors				
Tape to Tape				
64/160	Tape-to-Tape Connector	5	100	045923644788
64/161	6" Jumper Wire	5	100	045923644795
64/162	90° Connector	5	100	045923644801
Wire to Tape				
64/164	Wire to Tape Connector	6	100	045923644177
64/165	50' Tape Wire	1	50	045923644184

Item	Description	Length/Channel	Channel/Box	Channel Sets/Case	UPC
Channels and Diffusers					
Recessed					
64/150	Recessed Deep Channel and Diffuser	3.28'	5	12	045923644733
Surface					
64/151	Deep Channel and Diffuser	3.28'	5	12	045923644740
64/154	Shallow Channel and Diffuser	3.28'	5	12	045923644771
Corner					
64/152	45° Corner Channel and Diffuser	3.28'	5	12	045923644757



64-164



64-160



64-165



64-162



64-161



64-154



64-152



64-151




64-150

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

TAPE LIGHT DIMENSIONAL DIAGRAMS

64/110 | 64/111

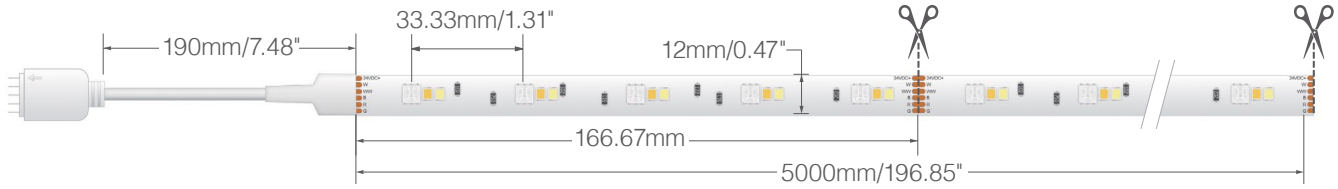

DRIVER CONNECTION DIAGRAMS

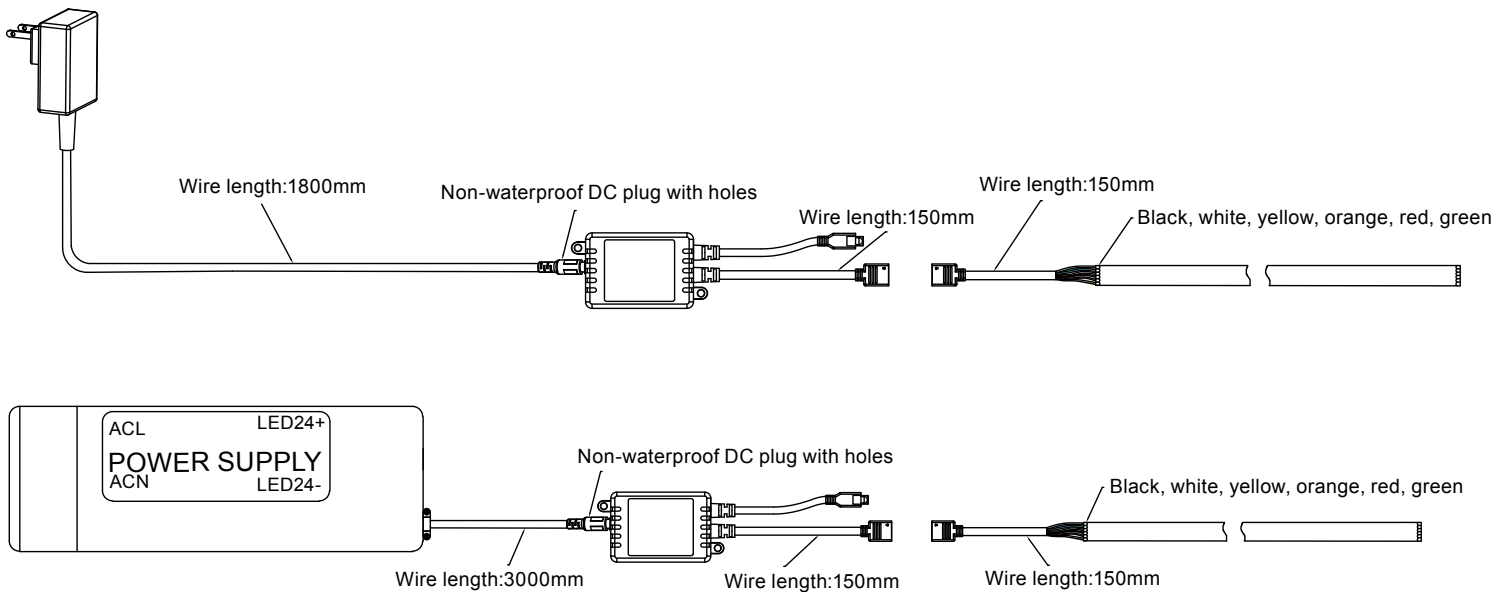


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

CHANNEL DIMENSIONAL DIAGRAMS


64/150

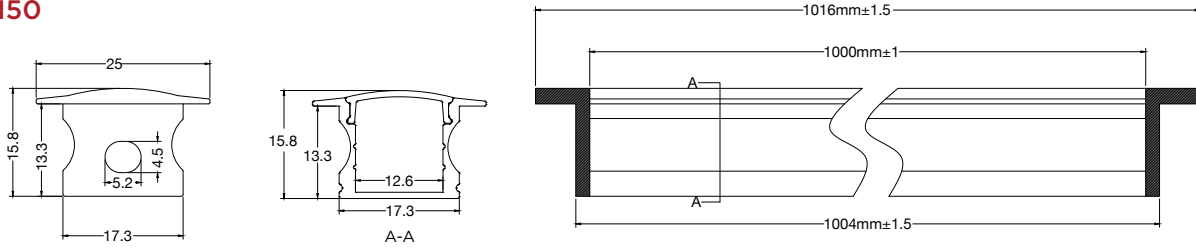


64/151

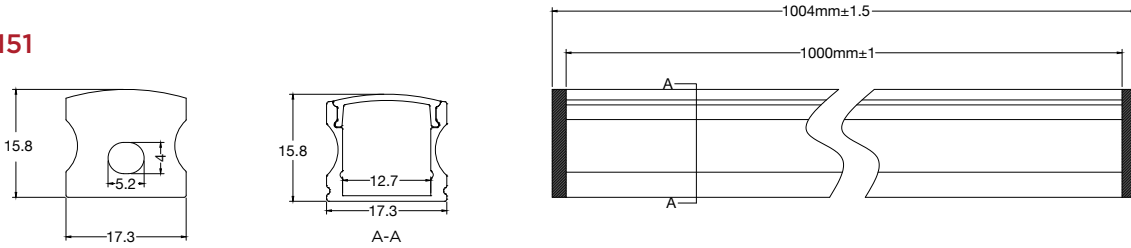

64/152

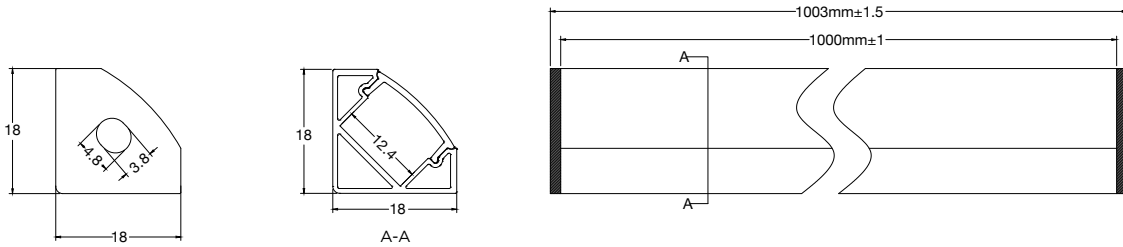

64/154

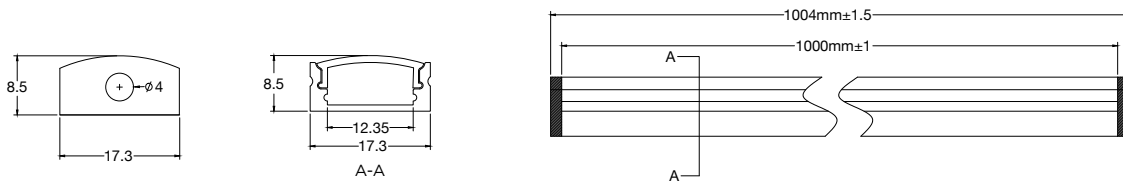

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.