

DIMENSION COLOR

INDOOR LED TAPE LIGHT KIT



DYNAMIC COLOR CHANGING

IR REMOTE CONTROL

16FT KIT AVAILABLE

PLUG-IN KIT

CUTTABLE

SUGGESTED APPLICATIONS:

Bedrooms, Mirror Backlighting,
Shelving, Picture Frames,
Office Decor



RGB



Add a vibrant splash of color to your space with DIMENSION Color, the perfect tape light for those seeking an easy and playful lighting solution. Designed with simplicity in mind, this RGB tape light is ideal for kids and anyone looking to infuse their environment with a burst of vivid hues. Let DIMENSION Color bring joy and excitement to your space as you effortlessly create a colorful and lively atmosphere.



*Via Remote

GENERAL SPECIFICATIONS

Color: RGB

CRI: 80

Functional Life: 50,000 Hours

Location Rating: Dry (Indoor Only)

Wired Controller: No

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Cuttable: Yes*, Distance between cuts: 3.94" (100mm)

Dimmable: Yes, Dimmable with Remote

Warranty: 1 Year

Remote: IR

* Tape may be cut where indicated for customized installations. 4-pin connectors are not available for reconnecting. Total tape length should not exceed the tape supplied in the kit.



ITEM SPECIFICATIONS / ORDER INFO

Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64-100	16'	Plug In	120V	12V	12W	1120L	1	045923640254

ACCESSORIES INCLUDED IN KITS



Plug-In Driver



IR Remote



Receiver



Single Reel

OPTIONAL ACCESSORIES

Item	Description	Length/Channel	Channel/Box	Channel Sets/Case	UPC
Channels and Diffusers					
Recessed					
64/150	Recessed Deep Channel and Diffuser	3.28'	5	12	045923644733
Surface					
64/151	Deep Channel and Diffuser	3.28'	5	12	045923644740
64/154	Shallow Channel and Diffuser	3.28'	5	12	045923644771
Corner					
64/152	45° Corner Channel and Diffuser	3.28'	5	12	045923644757



64-154

64-152



64-151

64-150

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

TAPE LIGHT DIMENSIONAL DIAGRAM

64/100



DRIVER CONNECTION DIAGRAM

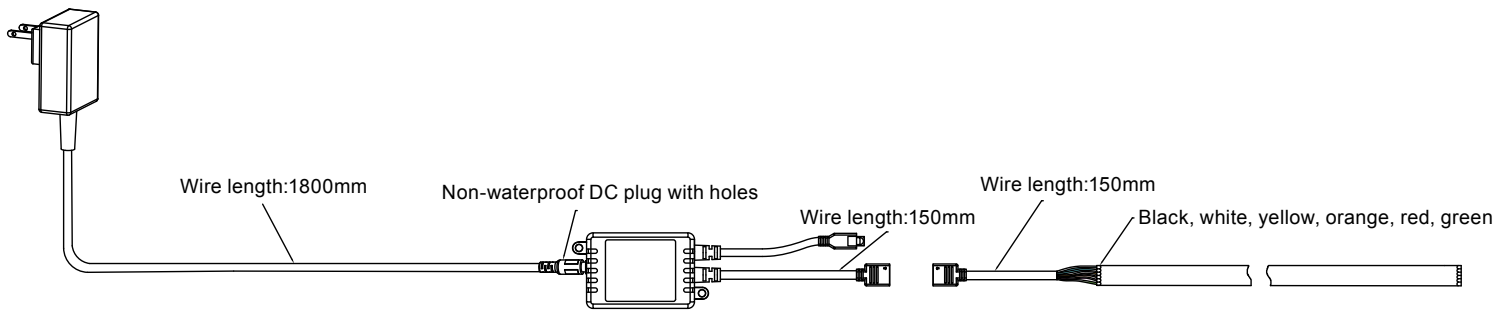


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

CHANNEL DIMENSIONAL DIAGRAMS


64/150

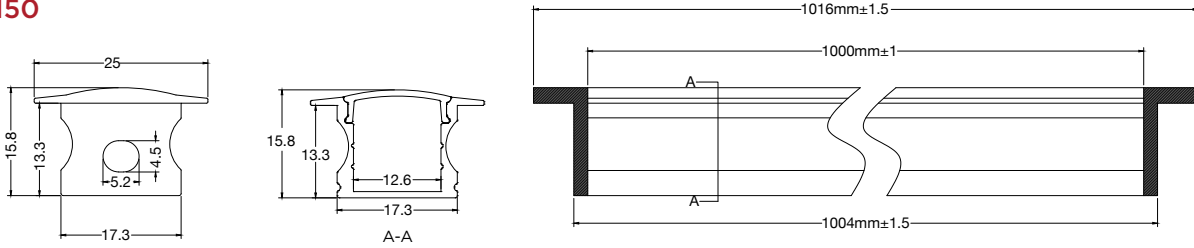


64/151

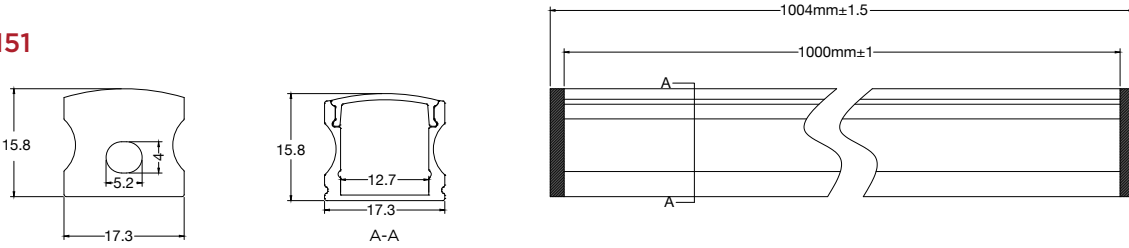

64/152

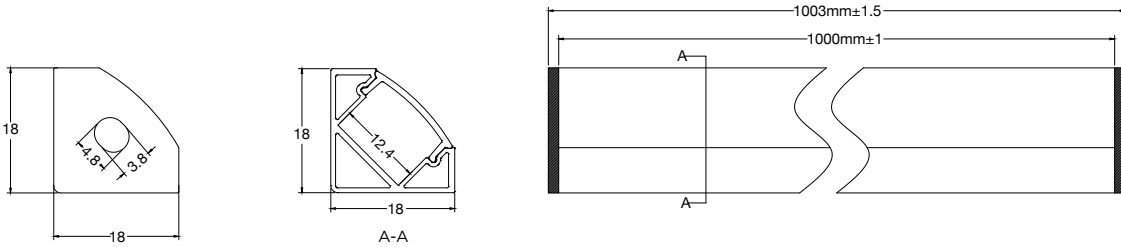

64/154

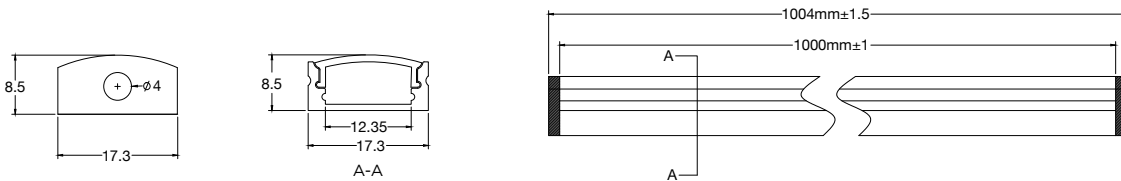

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.