

LED FIRE RATED SLIM FIT DOWNLIGHTS WITH REMOTE DRIVER



Flat Lens



Stepped Baffle



ColorQuick™

Selectable Color Technology

SATCO|NUVO's Fire Rated Recessed Downlights are the perfect solution for recessed lighting in fire resistant ceiling construction. These luminaires are 2-hour fire resistant certified and are ideal for applications that require a slim profile for easy installation. Providing excellent light quality and illumination these downlights deliver an added level of safety for your peace of mind in residential, multi-family and commercial applications.



FIRE RATED UP TO 2 HOURS

**RED PAINTED BACKPLATE
FOR EASY IDENTIFICATION**

**120V AND 120/277V MODELS
AVAILABLE**

**FLAT LENS AND STEPPED
BAFFLE TRIMS AVAILABLE IN
4" AND 6" CONFIGURATIONS**

5 CCT SELECTABLE

SUGGESTED APPLICATIONS

- Residential
- Multifamily
- Commercial
- Hospitality
- Offices



GENERAL SPECIFICATIONS

Power Factor: >0.9
THD%: ≤20%
Dimmable: Down to 10%
CCT Selectable:
 2700K/3000K/3500K/4000K/5000K
Efficacy: 80 LPW
CRI: 90
Beam Angle: 110°
Functional Life (L70): 50,000 Hours

2HR Fire Rated: Tested to comply with UL 263/ASTM E119/CAN-ULC S101-07
Location Rating: Wet
Suitable for Bathroom Applications
IC Rated
AT Rated
Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Construction: Steel
Lens: Frosted Polycarbonate
Trim Color: White
Back Plate: Red

ITEM SPECIFICATIONS / ORDER INFO



Item	Size	Trim Style	Voltage	Wattage	Replacement Wattage	Lumens	Input Current	Case Quantity	Weight	UPC
S11864	4"	Flat Lens	120V	10W	60W	800	0.083A	6	1.02 Lbs.	045923118647
S11865	4"	Stepped Baffle	120V	10W	60W	800	0.083A	6	1.02 Lbs.	045923118654
S11866	6"	Flat Lens	120V	13W	75W	1,050	0.108A	6	1.39 Lbs.	045923118661
S11867	6"	Stepped Baffle	120V	13W	75W	1,050	0.108A	6	1.39 Lbs.	045923118678
S11868	4"	Flat Lens	120/277V	10W	60W	800	0.083/0.036A	6	1.20 Lbs.	045923118685
S11869	6"	Flat Lens	120/277V	13W	75W	1,050	0.083/0.036A	6	1.55 Lbs.	045923118692





OPTIONAL ACCESSORIES

Item	Description	Case Quantity	Case UPC
80-943	4" Rough-in Remote Driver Mounting Plate	12	10045923809436
80-944	6" Rough-in Remote Driver Mounting Plate	12	10045923809443
80-946	4" Goof Ring	12	10045923809467
80-947	6" Goof Ring	12	10045923809474
80-985	6" Remote Driver Extension Cable	12	10045923809856

UL mark denotes these products meet the UL Standard for Safety Luminaires and are UL 1598 certified. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.





Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice. Visit www.satco.com or call 1-800-437-2826 for a list of compatible dimmers and warranty details. Warning: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

DIMENSIONS:

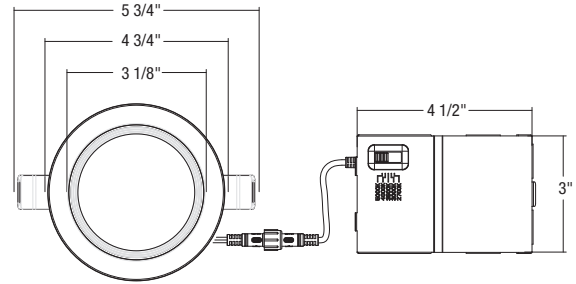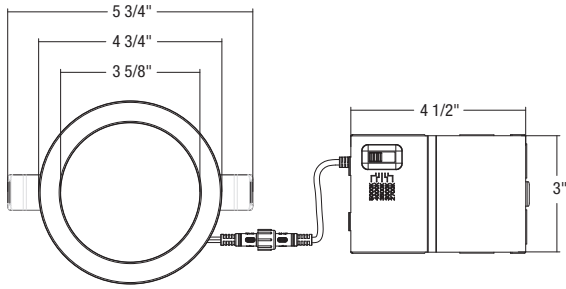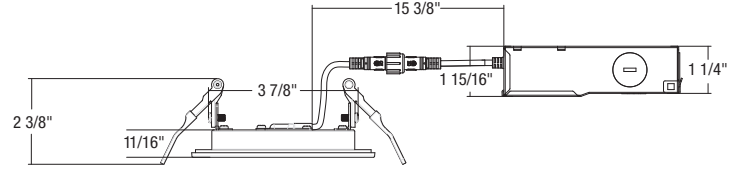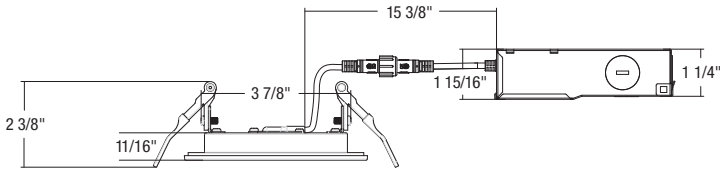

S11864 S11868
4" Models Flat Lens

S11865
4" Model Baffle

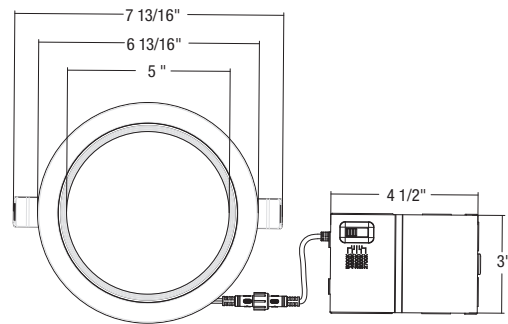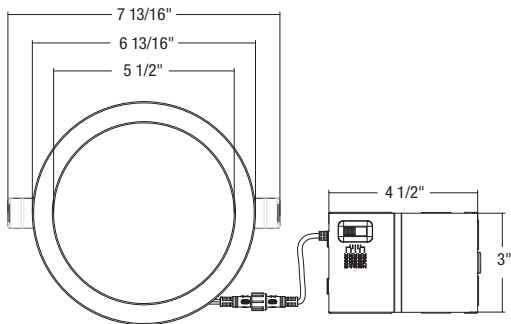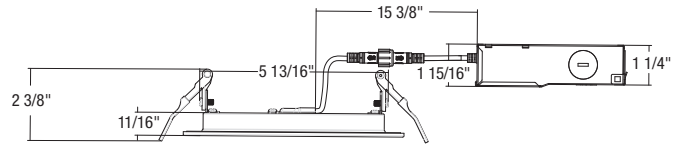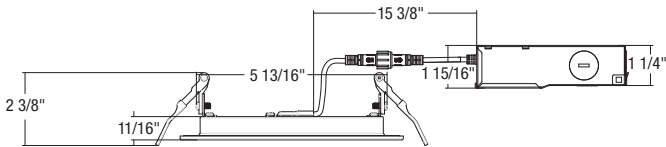

S11866 S11869
6" Models Flat Lens

S11867
6" Model Baffle