


LED PL LAMPS

HIGH LUMEN | CCT SELECTABLE



5 CCT SELECTABLE

HIGH LUMEN OUTPUT

300° BEAM ANGLE

RATED FOR EXTREME TEMPERATURES

SUGGESTED APPLICATIONS

- Hospitality
- Retail
- Offices
- Residential

Designed to deliver impressive brightness, LED High Lumen PL lamps outshine traditional fluorescents. The G24d base allows for seamless replacement of outdated fixtures, providing a hassle-free upgrade. With their advanced ballast bypass Type B technology, compatibility concerns are a thing of the past. Enjoy uniform illumination with a wide 300° beam angle, ensuring comprehensive coverage in any space. These lamps are engineered to withstand damp environments, making them ideal for various applications. Plus, they are rated for enclosed fixtures, ensuring optimal performance and safety.



GENERAL SPECIFICATIONS

Dual Voltage, Frequency: 120V/277V, 50/60Hz
Power Factor, THD%: >0.9, 20%
Dimmable: No
Beam Angle: 300°
Efficacy: up to 130 LPW
CRI: 82
Functional Life: 50,000 Hours

Location Rating: Damp
Rated for Enclosed Fixtures: Yes
Ambient Operating Temperature:
 -25°C (-13°F) to +50°C (+122°F)
Construction: Aluminum and Polycarbonate
Base: G24d
Operating Position: Universal


ITEM SPECIFICATIONS / ORDER INFO



Item	Max. Lumens	Wattage	Fluorescent Replacement Wattage	CCT	Input Current @ 120V/277V	Pack QTY
S21413	1,820	14W	26W	3000K/3500K/4000K/5000K/6500K	0.12/0.05A	24
S21414	2,340	18W	32W	3000K/3500K/4000K/5000K/6500K	0.15/0.07A	24
S21415	2,860	22W	42W	3000K/3500K/4000K/5000K/6500K	0.18/0.08A	24

DIMENSIONS/WEIGHTS

Item	MOL	MOD	Weight
S21413	5.89"	1.95"	0.40 Lbs
S21414	6.12"	1.95"	0.42 Lbs
S21415	6.38"	1.95"	0.43 Lbs

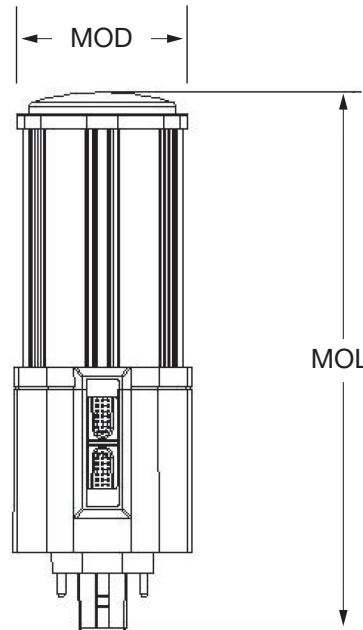

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.