

LED CIRCLINE LAMPS

CCT SELECTABLE | G10Q BASE



3 CCT SELECTABLE


RANGE VOLTAGE 120V-277V

DUAL MODE TYPE A/B

OFFERED IN 8" AND 12" MODELS


SUGGESTED APPLICATIONS

Ceiling and
Wall Mounted Fixtures,
Residential,
Multifamily,
Hospitality

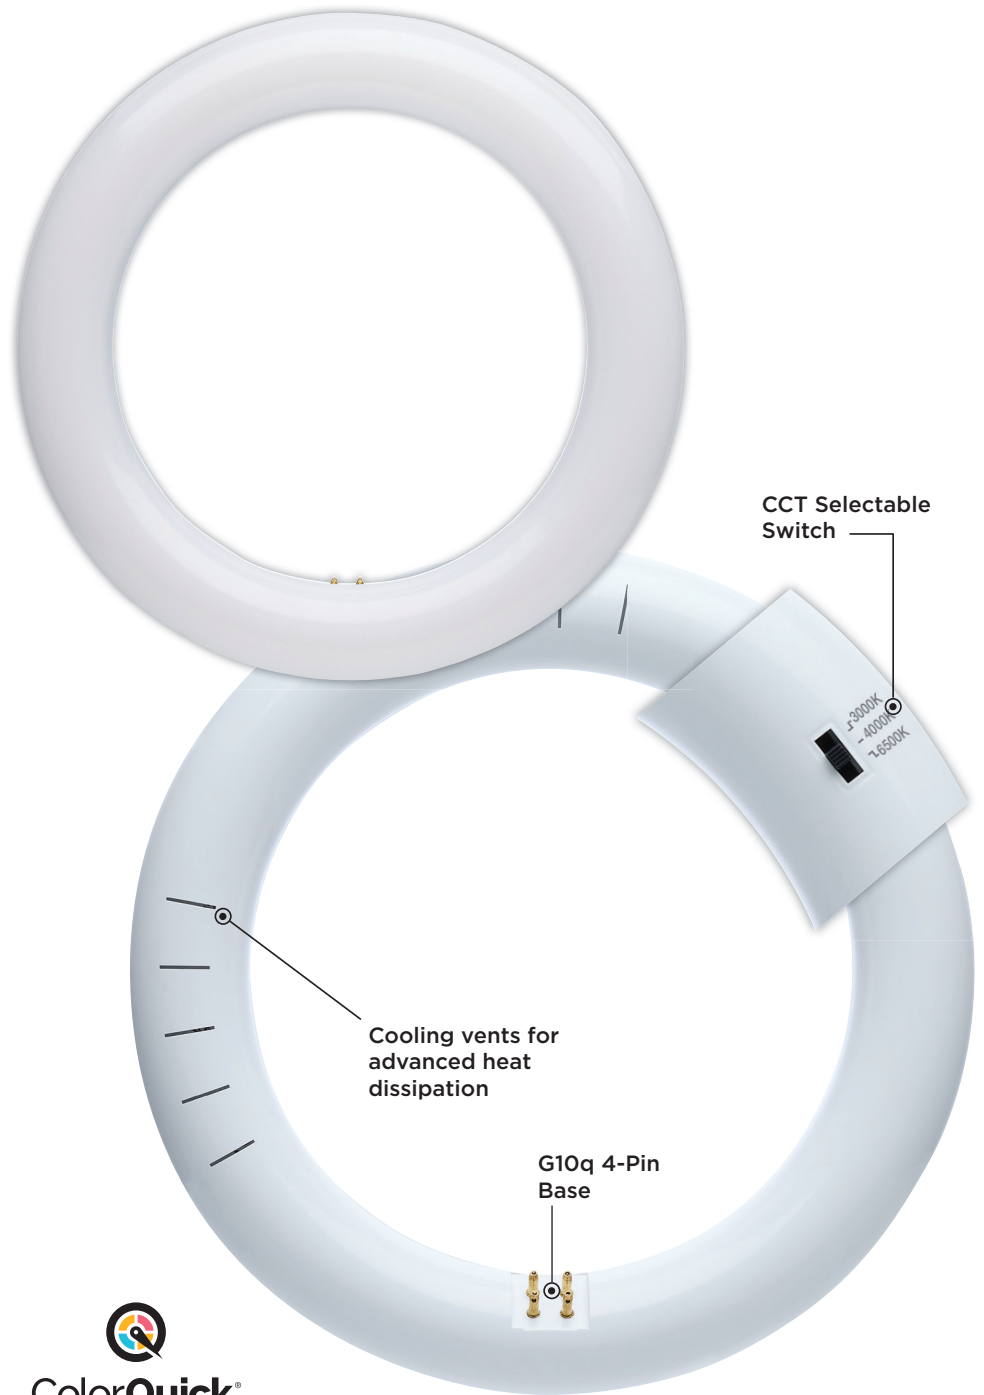

ColorQuick[®]

Selectable Color Technology



SATCO|NUVO's LED Circline lamps are ideal for upgrading traditional fluorescent lighting to more energy efficient lighting in shallow, round ceiling and wall mounted fixtures. CCT selectable, choose from warm 3000K, neutral 4000K or choose 6500K to bring the daylight inside. Designed with versatility in mind, these circline lamps are dual mode for use with ballast or in ballast bypass configurations and are range voltage ready for use in 120V-277V applications. Refresh kitchens, halls and bedrooms in residential, multifamily and hospitality settings.



GENERAL SPECIFICATIONS

Range Voltage, Frequency: 120V-277V, 50/60Hz
THD%: 25
Dimming: Non-Dimmable
Dual Mode: Type A/B
Lamp Efficacy: up to 127 LPW
CRI: 80+

CCT: 3000K/4000K/6500K
Beam Angle: 180°
Functional Life: 50,000 Hours
Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
Rated for Enclosed Fixtures: Yes
Base: G10q (4-Pin)




ITEM SPECIFICATIONS / ORDER INFO

| Item | Size | Lumens | Lamp Wattage | Fluorescent Replacement Wattage | Input Current @ 120V/277V | Pack QTY |
|--------|------|----------------|--------------|---------------------------------|---------------------------|----------|
| S16510 | 8" | 1300/1400/1350 | 11W | 22W | 0.09A-0.04A | 12 |
| S16511 | 12" | 1850/2000/1950 | 16W | 32W | 0.13A-0.06A | 12 |

DIMENSIONS

| Item | MOD | Weight |
|--------|--------|-----------|
| S16510 | 8.08" | 0.37 Lbs. |
| S16511 | 11.82" | 0.57 Lbs. |

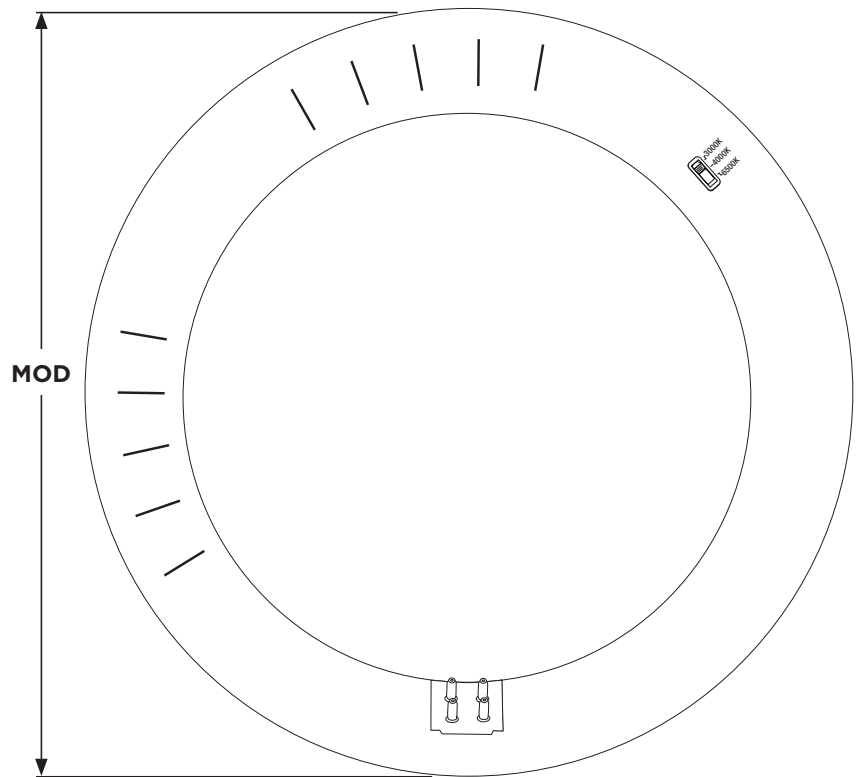

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.

Only compatible with electronic ballasts when installed in Type A mode. See ballast compatibility on satco.com for details. Not for use with magnetic ballasts.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.