

LED R14 LAMPS

MEDIUM BASE | INTERMEDIATE BASE



Elevate your lighting experience with SATCO|NUVO's R14 reflector LED light bulbs. Engineered for top-tier energy efficiency, these bulbs deliver vibrant, true-to-life white light with a high color rendering index (CRI) of 90. Choose between the inviting warmth of 3000K soft white or the crisp clarity of 5000K natural light. Available with E17 intermediate and E26 medium bases, they seamlessly integrate into a variety of fixtures. With a wide 110° beam angle and smooth dimming capability down to 10%, these versatile bulbs offer customizable lighting solutions for any environment. Whether it's illuminating living spaces, dining areas, or commercial establishments like offices, museums, or retail stores, these bulbs ensure the perfect ambiance for every occasion.



**40W INCANDESCENT
REPLACEMENT LAMPS**

**OFFERED WITH
E17 AND E26 BASES**

**SUITABLE FOR USE IN
ENCLOSED FIXTURES**

3000K AND 5000K OPTIONS

SUGGESTED APPLICATIONS

- Residential
- Commercial
- Decorative
- Accent Lighting
- Track Lighting



GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V, 60Hz
Power Factor: 0.9
THD: 26%
Input Current: 0.03A
Wattage: 3.5W
Incandescent Equivalent Wattage: 40W
Lumens: 300
Beam Angle: 110°
Dimmable: Phase-Cut dimmable down to 10%

Lamp Material/Finish: Polycarbonate/Frost
Efficacy: 85 LPW
CRI: 90
Functional Life: 25,000 Hours
Location Rating: Damp
Ambient Operating Temperature: -25°C (-13°F) to +45°C (+113°F)
Enclosed Fixture Rating: Enclosed Rated Lamp
Warranty: 5 Year Limited




ITEM SPECIFICATIONS / ORDER INFO

Item	Lamp Shape	Lamp Base	Finish	Wattage	CCT	Lumens	Package Type
S12260	R14	E17	Frost	3.5W	3000K	300	Carded
S12261	R14	E17	Frost	3.5W	5000K	300	Carded
S12262	R14	E26	Frost	3.5W	3000K	300	Carded
S12263	R14	E26	Frost	3.5W	5000K	300	Carded

DIMENSIONS / WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S12260	2.56"	1.78"	0.06 Lbs.
S12261	2.56"	1.78"	0.06 Lbs.
S12262	2.17"	1.78"	0.06 Lbs.
S12263	2.17"	1.78"	0.06 Lbs.

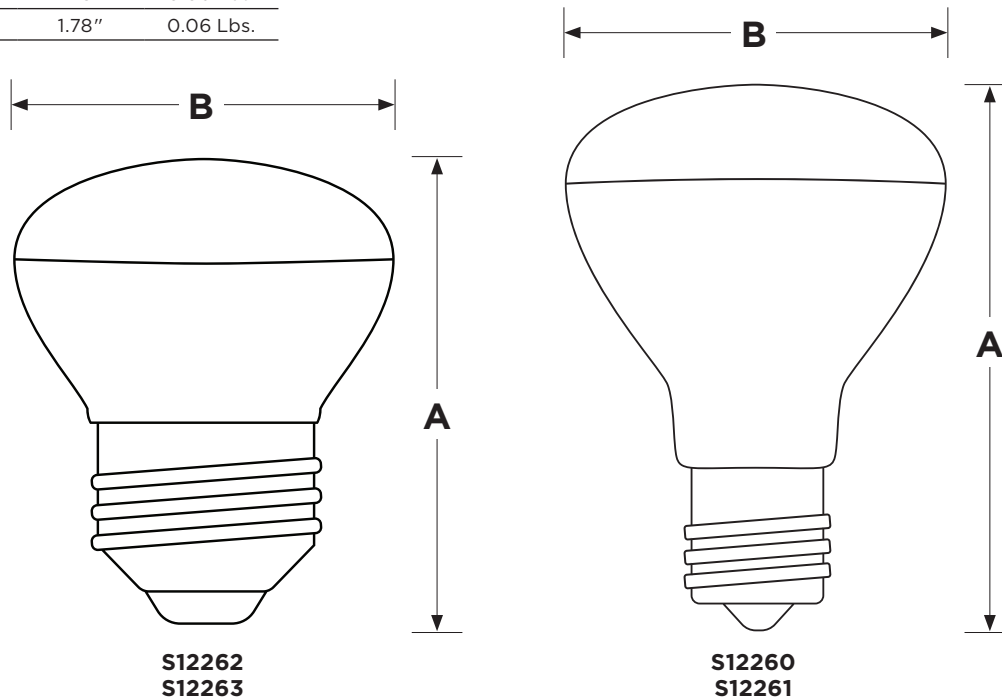

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Lamps may not be compatible with all dimmers.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Visit satco.com/service/warranty for complete warranty details.