

LED DUSK TO DAWN LAMPS

PAR | A19 | B11



ON AT DUSK, OFF AT DAWN

**THREE LAMP SHAPES -
NUMEROUS APPLICATIONS**

**REPLACE UP TO 90W
INCANDESCENT BULBS**

**EASY INSTALLATION INTO
STANDARD LIGHT SOCKETS**

SUGGESTED APPLICATIONS

- Flood Lights
- Entryways
- Porches
- Garages
- Landscape Lighting

SATCO|NUVO's LED dusk to dawn light bulbs are designed to automatically turn on at sunset and turn off at sunrise, providing convenient, energy-efficient lighting. Equipped with built-in sensors that detect ambient light levels, these bulbs ensure continuous illumination throughout the night without the need for manual intervention. They are ideal for outdoor spaces such as porches, driveways, and gardens, enhancing security and visibility. By reducing energy consumption and extending the lifespan of the bulb through precise usage, dusk to dawn light bulbs offer a practical and cost-effective lighting solution for both residential and commercial properties.



GENERAL SPECIFICATIONS

Input Voltage: 120V
Frequency: 60Hz
Dimming: Non-Dimmable
CRI: 90*

Integrated Sensor Type: Dusk to Dawn Photocell
Functional Life: 15,000 Hours
Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Warranty: 3 Years

* S11428 is 80 CRI.




ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Shape	Lumens	Wattage	Lens Finish	Replacement Wattage	Power Factor	Input Current	CCT	Efficacy	Beam Angle	Location Rating	Rated for Enclosed Fixture
S11475	PAR38	1250L	14W	Clear	90W	0.7	0.12A	3000K	up to 89 LPW	40°	Wet	No
S11476	PAR38	1250L	14W	Clear	90W	0.7	0.12A	5000K	up to 89 LPW	40°	Wet	No
S11428*	A19	800L	6.5W	Clear	60W	0.5	0.05A	2700K	up to 123 LPW	320°	Damp	Yes
S11427	A19	800L	8.5W	Frost	60W	0.75	0.07A	5000K	up to 94 LPW	200°	Damp	Yes
S11429	A19	800L	8.5W	Frost	60W	0.74	0.07A	2700K	up to 94 LPW	200°	Damp	Yes
S11477	B11	500L	5W	Clear	60W	0.7	0.04A	2700K	up to 100 LPW	280°	Damp	No
S11478	B11	500L	5W	Clear	60W	0.7	0.04A	5000K	up to 100 LPW	280°	Damp	No

* S11428 is not T20 Compliant.

DIMENSIONS / WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S11475	5.12"	4.72"	0.43 Lbs.
S11476	5.12"	4.72"	0.43 Lbs.
S11428	4.02"	2.36"	0.07 Lbs.
S11427	4.17"	2.38"	0.10 Lbs.
S11429	4.17"	2.36"	0.10 Lbs.
S11477	4.02"	1.38"	0.08 Lbs.
S11478	4.02"	1.38"	0.08 Lbs.

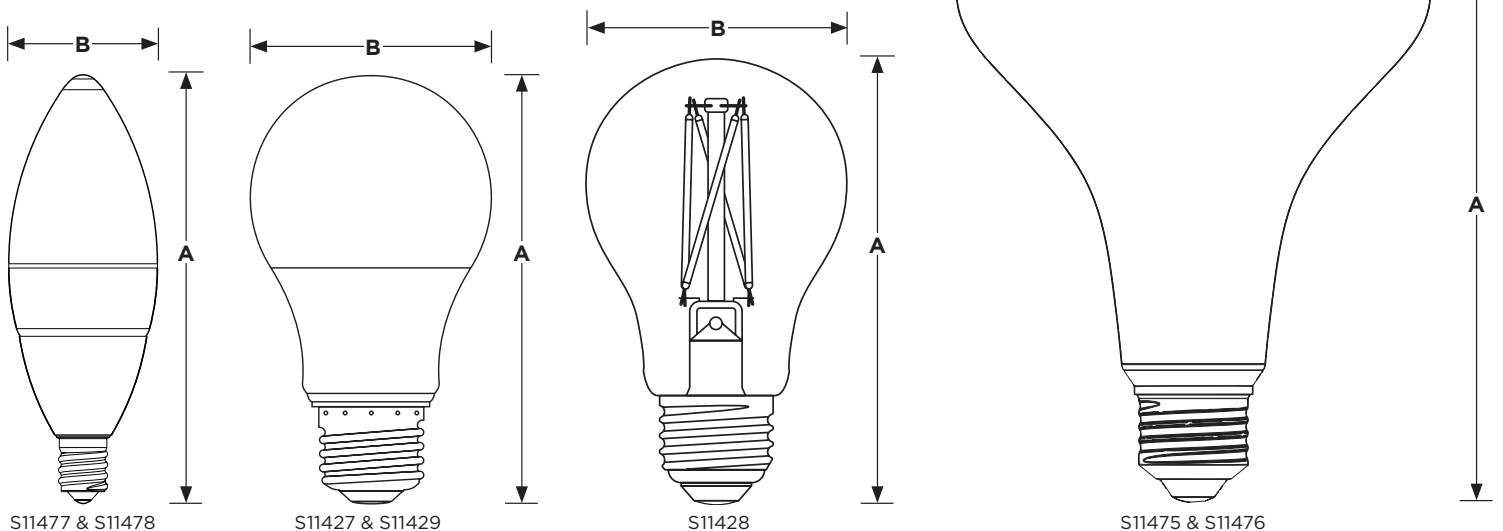

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.