



RANGE VOLTAGE
120V-277V

PLUG-IN OR DIRECT WIRE

LINKABLE UNITS

PORTABLE, VERSATILE

360° BEAM SPREAD

SUGGESTED APPLICATIONS

Temporary Lighting
Warehouses
Construction Job Sites
Workshops

TEMPORARY WORK LIGHT

PRO SERIES | 120V-277V



Elevate your job-site lighting with SATCO|NUVO's PRO Series Temporary Work Lights. Designed to endure tough conditions, these durable yet lightweight lamps are perfect for both indoor and outdoor use. Choose from three models: 60W with 6,000 lumens, 100W with 10,000 lumens, or 150W with 15,000 lumens, to meet your specific lighting needs. Constructed for rapid heat dissipation, each lamp also features a 15-foot quick-connect power cord for easy setup. The spring-loaded folding handle allows for effortless installation and maneuverability. Delivering 360-degree illumination, these lamps include integrated 4kV surge protection and IP65 rated connectors, enabling multiple units to link together seamlessly to illuminate expansive workspaces.



GENERAL SPECIFICATIONS

Range Voltage: 120V-277V

Frequency: 50/60Hz

Power Factor: 0.9

THD: <20%

Dimming: Non-Dimmable

Surge Protection Rating: 4kV

Efficacy: 100 LPW

CCT: 5000K

CRI: 80

Beam Angle: 360°

Location Rating: Damp

Ambient Operating Temperature: -30°C (-22°F) to +60°C (+140°F)

Material: Steel Cage, Aluminum Heat Sink

Lens Material: Polycarbonate/Frost

Cord Diameter: 18AWG

Functional Life: 50,000 Hours

Warranty: 5 Years



ITEM SPECIFICATIONS / ORDER INFO


Item	Lumens	Watts	Replacement Wattage	Input Current @120V-277V	Connectable Units @120V	Connectable Units @277V
S13170	6000	60W	200W	0.50-0.22A	10 Units	20 Units
S13171	10000	100W	400W	0.83-0.36A	6 Units	12 Units
S13172	15000	150W	600W	1.25-0.54A	4 Units	8 Units

ACCESSORIES (SOLD SEPARATELY)

Item	Description
80-861	120-277 Volt Adapter; 1 Foot; Black Finish
80-862	10 Foot Extension Cord (18AWG)
80-863	25 Foot Extension Cord (18AWG)

DIMENSIONS/WEIGHTS

Item	Diameter (A)	Height (B)	Weight
S13170	5.12"	9.17"	5.29 Lbs.
S13171	5.12"	10.94"	6.17 Lbs.
S13172	5.12"	12.13"	6.83 Lbs.

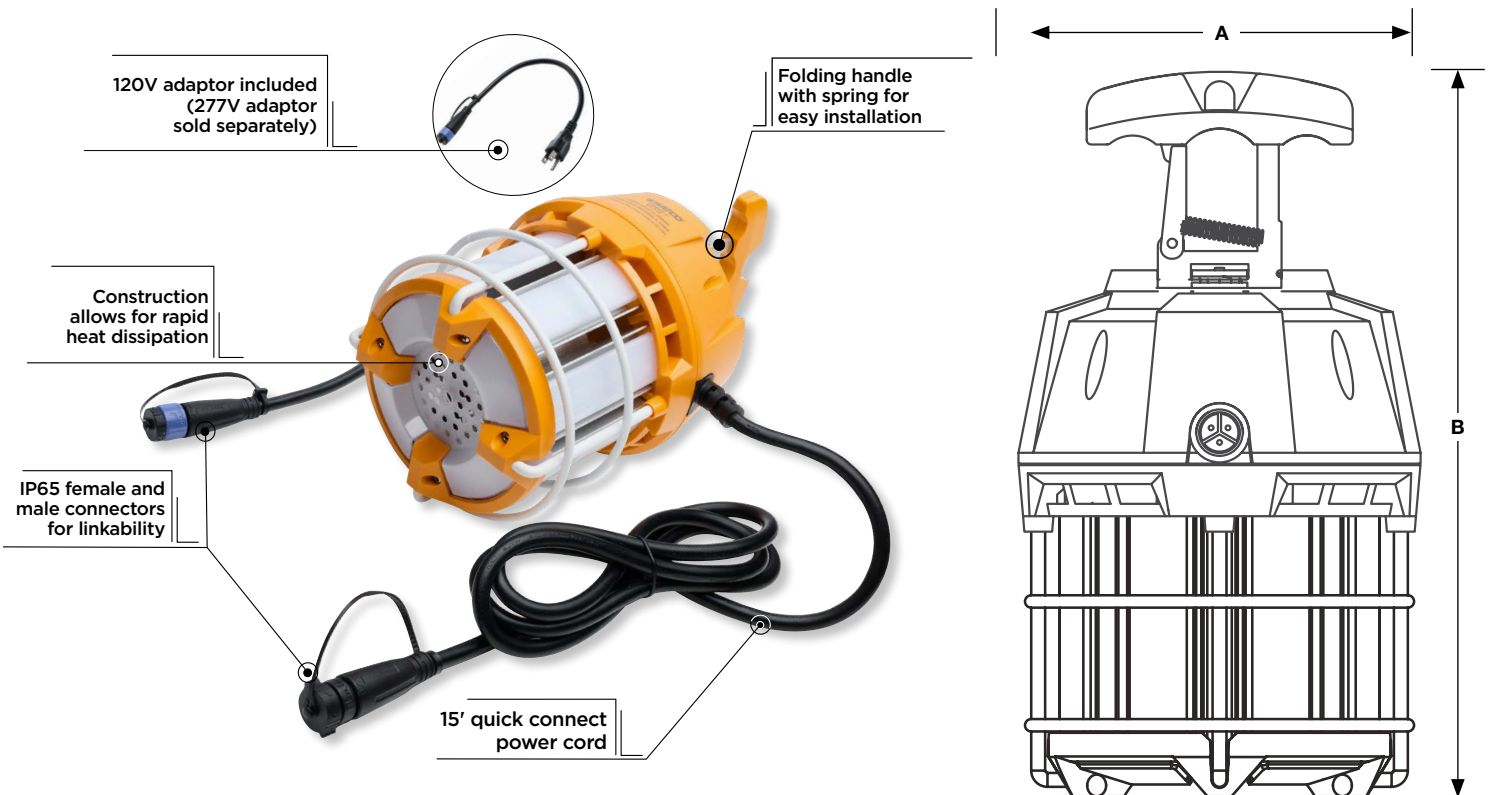

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION - RISK OF ELECTRIC SHOCK. Do not use if outer lamp envelope is damaged or broken.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Specifications are subject to change without prior notice.