SATCO NUVO



OMNI-DIRECTIONAL LIGHT
OUTPUT

ADJUSTABLE BEAM ANGLE 100° - 300°

3" EXTENSION INCLUDED

SUGGESTED APPLICATIONS
Indoor Residential
Garages
Workshops

GARAGE AND UTILITY LIGHT

OMNI-DIRECTIONAL | ADJUSTABLE





Fully Open - 100° Illumination

SATCO|NUVO's LED Garage and Utility Lights easily provide ample illumination to garages, workshops, utility rooms and more. Simply screw into any standard lamp socket and adjust the LED panels as desired from 300° (closed) to 100° when fully open, to utilize the omni-directional light output. With an impressive functional lifespan of 50,000 hours and rated for use in damp locations, these lamps are engineered to provide long-lasting and reliable performance across a wide range of conditions and applications.











GARAGE AND UTILITY LIGHT

OMNI-DIRECTIONAL | ADJUSTABLE

GENERAL SPECIFICATIONS

Input Voltage: 120V Frequency: 60Hz Power Factor: 0.9

Dimming: Non-Dimmable **Efficacy:** up to 100 LPW

CRI: 80

Location Rating: Damp

Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)

Rated for Enclosed Fixtures: No Adjustable Beam Angle: 100° - 300°

Construction: Polycarbonate Lamp Shape: Multi-Beam Lens Finish: Frosted

Base: E26

Adapter: 3" Extension Included Functional Life: 50,000 Hours

Warranty: 5 Years




ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Lumens	Wattage	Replacement Wattage	Input Current	ССТ
S13146	3000	30W	200W	0.28A	5000K
S13147	6000	60W	500W	0.57A	5000K

DIMENSIONS / WEIGHTS

Item	Length (A)	Width (B)	Weight
S13146	4.50"	13.98"	1.05 Lbs.
S13147	4.57"	13.98"	0.96 Lbs.

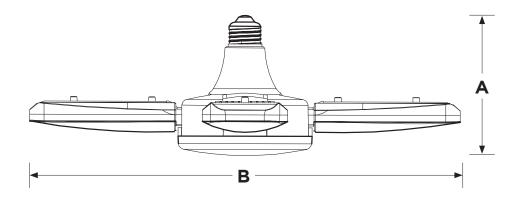



4-Color Packaging for Point of Sale Purchase Opportunities

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.