



# LED T8 LAMPS

TYPE A + B | CCT SELECTABLE



**DUAL MODE TYPE A + B**

**5 CCT SELECTABLE**

**RANGE VOLTAGE 120V-277V**


**OFFERED IN 2', 3' AND 4' LENGTHS**

**SUGGESTED APPLICATIONS**

- Offices
- Medical offices
- Retail
- Warehouses



**ColorQuick**  
Selectable Color Technology



**2', 3', and 4',  
Models Available**

SATCO|NUVO's LED T8 Lamps - Type A + B are versatile for use in ballast bypass or ballast compatible configurations. High-performing, these lamps are damp location rated for reliable use in humid areas. With five selectable CCTs at installation, and dimmable on compatible ballasts, these lamps allow for a customized lighting experience. Available in 2', 3', and 4' lengths, they support both single-ended and double-ended wiring for flexible installation.



**GENERAL SPECIFICATIONS**

**Range Voltage, Frequency:** 120V-277V, 50/60Hz  
**Power Factor:** 0.9  
**THD %:** 20%  
**Dual Mode:** Type A + B  
**Dimming:** Dimmable when used with select emergency and dimming ballasts  
**Wiring:** Single Ended; Double Ended  
**Efficacy:** up to 150 LPW  
**CRI:** 80

**Beam Angle:** 170°  
**Location Rating:** Damp  
**Ambient Operating Temperature:** -20°C (-4°F) to +45°C (+113°F)  
**Rated for Enclosed Fixtures:** Yes  
**Base:** G13; Medium Bi Pin  
**Functional Life:** 50,000 Hours  
**Warranty:** 5 Years




**ITEM SPECIFICATIONS / ORDER INFO**

Item	Size	Lumens	Wattage	Fluorescent Replacement Wattage	Input Current @120V/277V	CCT Selectable	DLC ID
S21760	2'	1450	10W	17W	0.08-0.04A	3000K/3500K/4000K/5000K/6500K	S-KYQNVV
S21761	3'	1650	11W	25W	0.09-0.04A	3000K/3500K/4000K/5000K/6500K	S-DTLYVZ
S21762	4'	1800	12W	25W/28W/30W/32W	0.10-0.04A	3000K/3500K/4000K/5000K/6500K	S-75NDW8
S21763	4'	2200	15W	25W/28W/30W/32W	0.13-0.05A	3000K/3500K/4000K/5000K/6500K	S-BP3J9K

**DIMENSIONS/WEIGHTS**

Item	MOL (A)	MOD (B)	Weight
S21760	24.65"	1.00"	0.27 Lbs.
S21761	36.61"	1.00"	0.39 Lbs.
S21762	48.67"	1.00"	0.49 Lbs.
S21763	48.67"	1.00"	0.49 Lbs.

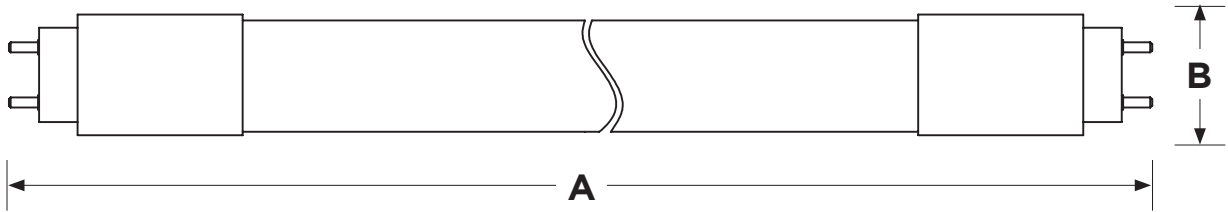

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

May not be compatible with all dimming ballasts. Visit [satco.com](http://satco.com) for details.

Bypass Type B operation requires non-shunted lamp holders

Specifications are subject to change without prior notice.

Replacement wattage shown depends on application and fixture

DLC Primary Use: Dual Mode Internal Driver (UL Type A and Type B)

Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.