



CCT SELECTABLE

TYPE B BALLAST BYPASS


FOUR DIFFERENT PIN-BASED  
MODEL OPTIONS

SUGGESTED APPLICATIONS

- Retail
- Hospitality
- Office Buildings
- Schools

# CFL REPLACEMENT LAMPS

CCT SELECTABLE | UNIVERSAL OPERATION

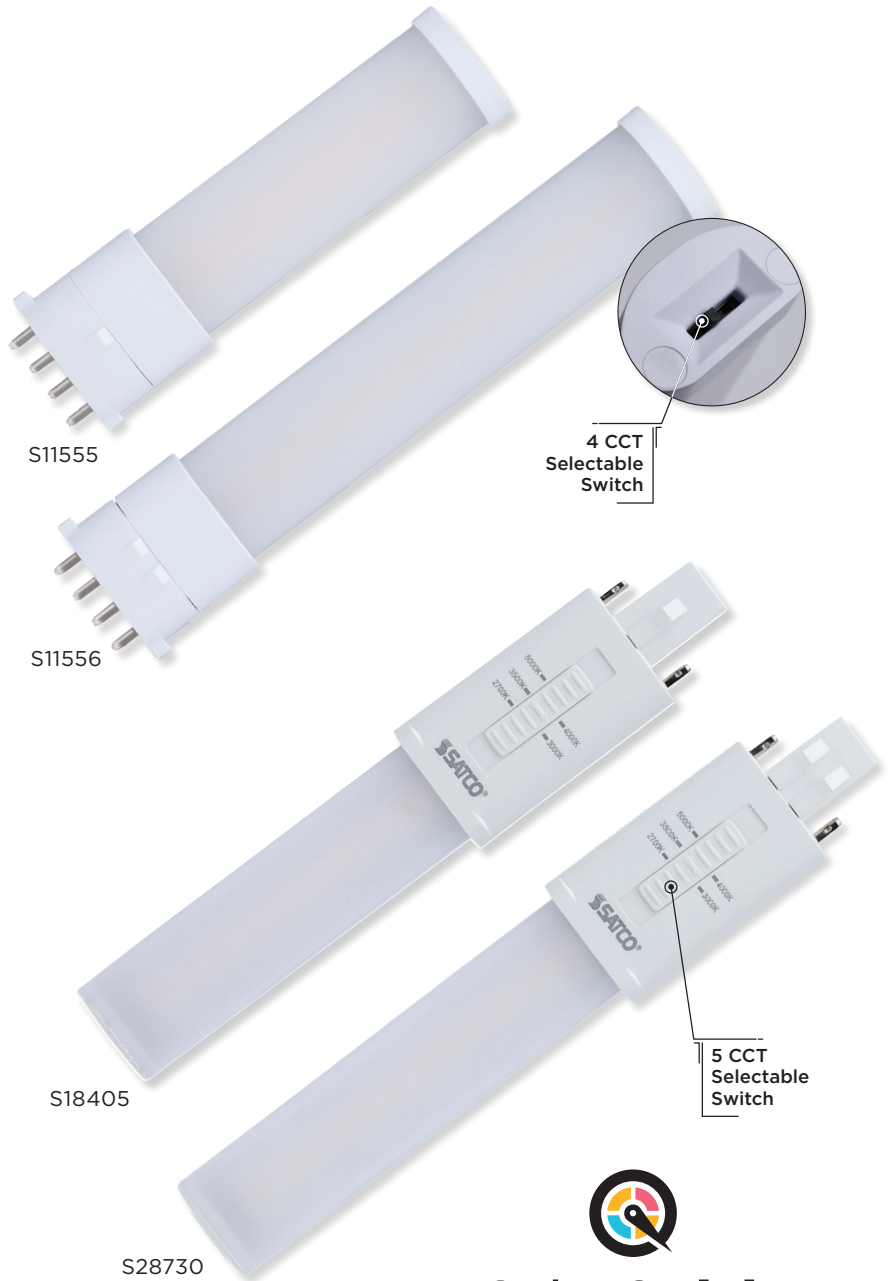

Upgrade your lighting with SATCO|NUVO's energy-efficient Type B ballast bypass LED replacement lamps. These innovative lamps are available in multiple base options to suit your needs. The 3.5W model for 5/7/9W CFL lamps with a 2G7 base and the 5.5W model for 13W CFL lamps with a 2GX7 base are 4 CCT selectable, while the 4.5W model for 5/7/9W CFL lamps with a G23 base and the 6W model for 13W CFL lamps with a GX23 base offer 5 CCT selectable technology. Designed to replace traditional CFLs, these lamps significantly reduce energy consumption and lower utility costs, making them an ideal choice for efficient and sustainable lighting in both residential and commercial applications.



**GENERAL SPECIFICATIONS**

**Input Voltage:** 120V-277V  
**Frequency:** 50/60Hz  
**Power Factor:** 0.9  
**THD:** <20%  
**Dimmable:** Non-Dimmable  
**Ballast:** Type B-Ballast Bypass  
**CRI:** 80  
**Location Rating:** Damp


**Ambient Operating Temperature:** -20°C (-4°F) to +45°C (+113°F)  
**Operating Position:** Universal  
**Lamp Shape:** PL  
**Material:** Polycarbonate  
**Lens Finish:** Frost  
**Functional Life:** 50,000 Hours  
**Warranty:** 5 Years

**ITEM SPECIFICATIONS / ORDER INFO**



Item	Wattage	CFL Replacement Wattage	Lamp Lumens	Efficacy	Input Current	Lamp Base	CCT	Beam Angle	Rated for Enclosed Fixture
S11555	3.5W	5W/7W/9W	380/390/400/410	Up to 117 LPW	0.03-0.01A	2G7	2700K/3000K/3500K/4000K	120°	No
S11556	5.5W	13W	600/620/630/650	Up to 118 LPW	0.05-0.02A	2GX7	2700K/3000K/3500K/4000K	120°	No
S18405	4.5W	5W/7W/9W	450/475/500/500/475	Up to 111 LPW	0.04-0.02A	G23	2700K/3000K/3500K/4000K/5000K	360°	Yes
S28730	6W	13W	600/625/650/650/625	Up to 108 LPW	0.05A-0.02A	GX23	2700K/3000K/3500K/4000K/5000K	360°	Yes

Item	MOD (A)	MOL (B)	Weight
S11555	1.26"	4.74"	0.06 Lbs
S11556	1.26"	6.51"	0.07 Lbs
S18405	1.27"	6.50"	0.09 Lbs
S28730	1.27"	7.09"	0.10 Lbs

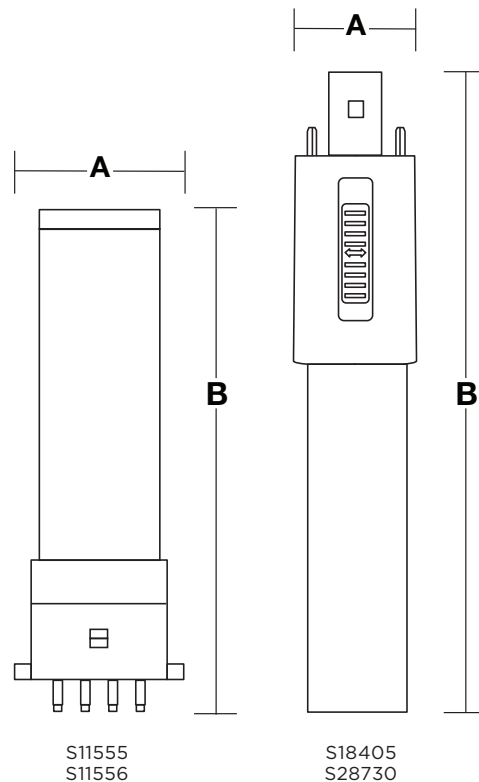

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

May not be compatible with all dimming ballasts. Visit [satco.com](http://satco.com) for details.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.

CAN ICES-005 (B) Meets requirements of ICES-005 issue 5 class B for use in residential applications.