



CCT SELECTABLE

TYPE B BALLAST BYPASS

**FOUR DIFFERENT PIN-BASED
MODEL OPTIONS**


**SINGLE AND DOUBLE-SIDED
ILLUMINATION**

SUGGESTED APPLICATIONS

Retail
Hospitality
Office Buildings
Schools

CFL REPLACEMENT LAMPS

CCT SELECTABLE | UNIVERSAL OPERATION

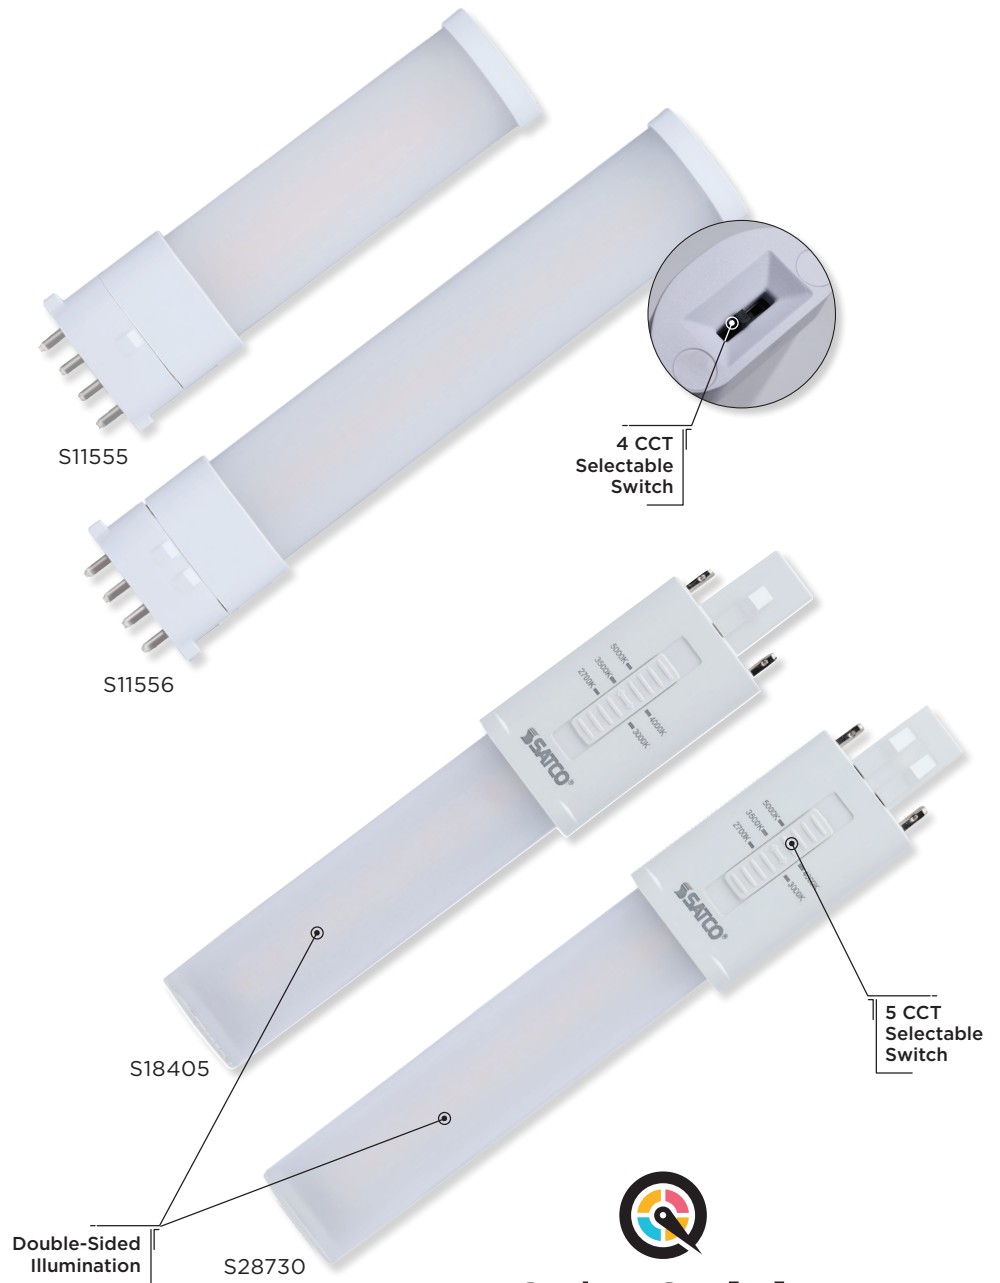

Upgrade your lighting with SATCO|NUVO's energy-efficient Type B ballast bypass LED replacement lamps. These innovative lamps are available in multiple base options to suit your needs. The 3.5W model for 5/7/9W CFL lamps with a 2G7 base and the 5.5W model for 13W CFL lamps with a 2GX7 base are 4 CCT selectable, while the 4.5W model for 5/7/9W CFL lamps with a G23 base and the 6W model for 13W CFL lamps with a GX23 base offer 5 CCT selectable technology. Designed to replace traditional CFLs, these lamps significantly reduce energy consumption and lower utility costs, making them an ideal choice for efficient and sustainable lighting in both residential and commercial applications.



GENERAL SPECIFICATIONS

Input Voltage: 120V-277V
Frequency: 50/60Hz
Power Factor: 0.9
THD: <20%
Dimmable: Non-Dimmable
Ballast: Type B-Ballast Bypass
CRI: 80
Efficacy: Up to 118 LPW


Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
Operating Position: Universal
Lamp Shape: PL
Material: Polycarbonate
Lens Finish: Frost
Functional Life: 50,000 Hours
Warranty: 5 Years

ITEM SPECIFICATIONS / ORDER INFO



Item	Wattage	CFL Replacement Wattage	Lamp Lumens	Input Current	Lamp Base	CCT	Illumination Type	Beam Angle	Rated for Enclosed Fixture
S11555	3.5W	5W/7W/9W	380/390/400/410	0.03-0.01A	2G7	2700K/3000K/3500K/4000K	Single-Sided	120°	No
S11556	5.5W	13W	600/620/630/650	0.05-0.02A	2GX7	2700K/3000K/3500K/4000K	Single-Sided	120°	No
S18405	4.5W	5W/7W/9W	450/475/500/500/475	0.04-0.02A	G23	2700K/3000K/3500K/4000K/5000K	Double-Sided	360°	Yes
S28730	6W	13W	600/625/650/650/625	0.05A-0.02A	GX23	2700K/3000K/3500K/4000K/5000K	Double-Sided	360°	Yes

Item	MOD (A)	MOL (B)	Weight
S11555	1.26"	4.74"	0.06 Lbs
S11556	1.26"	6.51"	0.07 Lbs
S18405	1.27"	6.50"	0.09 Lbs
S28730	1.27"	7.09"	0.10 Lbs

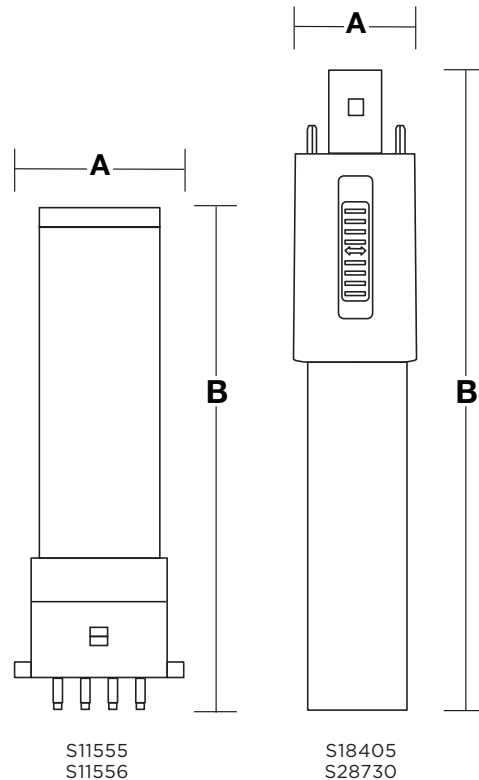

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

May not be compatible with all dimming ballasts. Visit satco.com for details.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.

CAN ICES-005 (B) Meets requirements of ICES-005 issue 5 class B for use in residential applications.