



# LED A21 3-WAY LAMP

## 50W/100W/150W REPLACEMENT



**5W/14W/20W 3-WAY LAMP**

**EXCEPTIONAL COLOR  
RENDERING**

**OMNIDIRECTIONAL  
ILLUMINATION**

**SUGGESTED APPLICATIONS**

- Residential
- Multifamily
- Hospitality
- Offices

Elevate your lighting with SATCO|NUVO's versatile LED 3-Way Lamp, designed to deliver exceptional clarity and ambiance across any setting—whether it's residential, hospitality, or office environments. With a remarkable 90 CRI for true-to-life color illumination, this lamp offers brightness settings of 5W, 14W, and 20W, allowing you to seamlessly switch between cozy warmth or crisp, bright light. Offered in four color temperatures from a soft 2700K to 5000K natural light, it adapts effortlessly to your needs, ensuring the perfect lighting for every occasion. Transform your space with sophisticated, energy-efficient lighting that combines style, functionality, and unparalleled flexibility.



**GENERAL SPECIFICATIONS**

**Input Voltage:** 120V  
**Frequency:** 60Hz  
**Power Factor:** 0.93  
**THD %:** 42%  
**Input Current:** 0.04/0.12/0.17A  
**Efficacy:** up to 120 LPW  
**CRI:** 90  
**Dimming:** Non-Dimmable  
**Beam Angle:** 220°

**Location Rating:** Damp  
**Ambient Operating Temperature:** -25°C (-13°F) to +45°C (+113°F)  
**Rated for Enclosed Fixtures:** Yes  
**Lamp Shape:** A21  
**Base:** E26  
**Construction:** Plastic  
**Functional Life:** 25,000 Hours  
**Warranty:** 5 Years




**ITEM SPECIFICATIONS / ORDER INFO**

Item	CCT	Lumens	Wattage	Incandescent Replacement Wattage
S11515	2700K	600/1600/2150	5W/14W/20W	50W/100W/150W
S11516	3000K	600/1600/2150	5W/14W/20W	50W/100W/150W
S11517	4000K	600/1600/2150	5W/14W/20W	50W/100W/150W
S11518	5000K	600/1600/2150	5W/14W/20W	50W/100W/150W

**DIMENSIONS / WEIGHTS**

Item	MOL (A)	MOD (B)	Weight
S11515	5.55"	2.64"	0.32 Lbs.
S11516	5.55"	2.64"	0.32 Lbs.
S11517	5.55"	2.64"	0.32 Lbs.
S11518	5.55"	2.64"	0.32 Lbs.

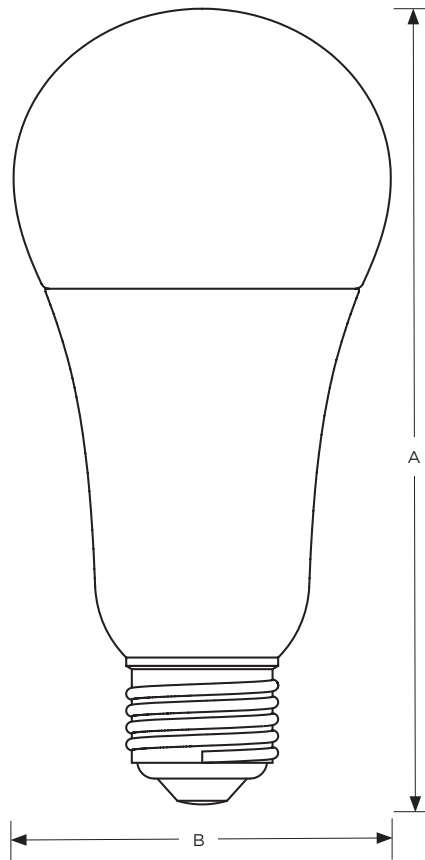

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.

Visit [satco.com/service/warranty](http://satco.com/service/warranty) for complete warranty details.