

# HI-PRO A21 LAMPS

HIGH LUMEN | CCT SELECTABLE



**3 CCT SELECTABLE**

**RANGE VOLTAGE 120V-277V**

**BALLAST BYPASS TYPE B**

**INTEGRATED FINS  
FOR EXCELLENT HEAT  
DISSIPATION**

**SUGGESTED APPLICATIONS**

Post Top Fixtures  
Bollards  
Low-Bay Downlights



**ColorQuick**<sup>®</sup>  
Selectable Color Technology



SATCO|NUVO's LED Hi-Pro A21 Lamps offer ColorQuick convenience ideal for commercial projects. Choose from 2700K/4000K/5000K color temperatures at installation to achieve the desired atmosphere for the environment. Designed to work in 120V to 277V fixtures, these lamps are compatible with ballast bypass fixtures and are dimmable when used in 120V applications. With enclosed decorative and functional fixtures in mind, these lamps were engineered with fins to promote heat dissipation, even in high operating temperatures.



**GENERAL SPECIFICATIONS**

**Range Voltage:** 120V-277V  
**Frequency:** 50/60Hz  
**Power Factor:** >0.9  
**Dimmable:**  
 120V Only; Phase-Cut Dimmable Down to 10%  
**Efficacy:** up to 151 LPW  
**Ballast Bypass:** Type B  
**CCT:** 2700K/4000K/5000K  
**Beam Angle:** 280°

**Functional Life:** 50,000 Hours  
**Location Rating:** Damp  
**Housing:** Die-Cast Aluminum  
**Lens:** Polycarbonate  
**Ambient Operating Temperature:** -25°C (-13°F) to +45°C (+113°F)  
**Enclosed Fixture Rating:** Yes  
**Minimum Compartment Size:** 6" x 6" x 8.5"  
**Base:** E26




**ITEM SPECIFICATIONS / ORDER INFO**

Item	Lumen Range	Wattage	Replacement Wattage	Input Current	CRI	Title 20	Pack QTY
S28735	1920/2025/1950	15W	125W	0.15A	90	Yes	24
S28737	2760/3020/2860	20W	150W	0.20A	80	Exempt	24

**DIMENSIONS / WEIGHTS**

Item	MOL (A)	MOD (B)	Weight
S28735	5.08"	2.46"	0.44 Lbs.
S28737	5.08"	2.46"	0.44 Lbs.

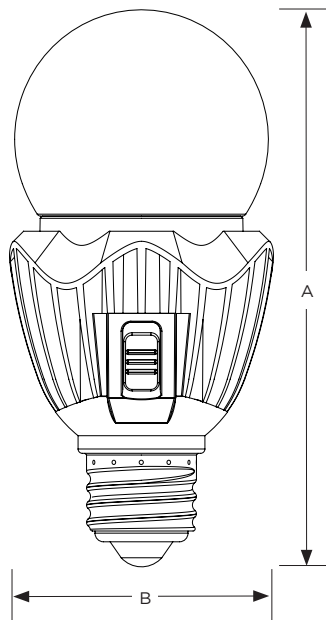

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Dimmable only when used in 120V applications. May not be compatible with all dimmers. See [satco.com](http://satco.com) for dimmer compatibility list.

Replacement wattage shown depends on application and fixture. Specifications are subject to change without prior notice.